

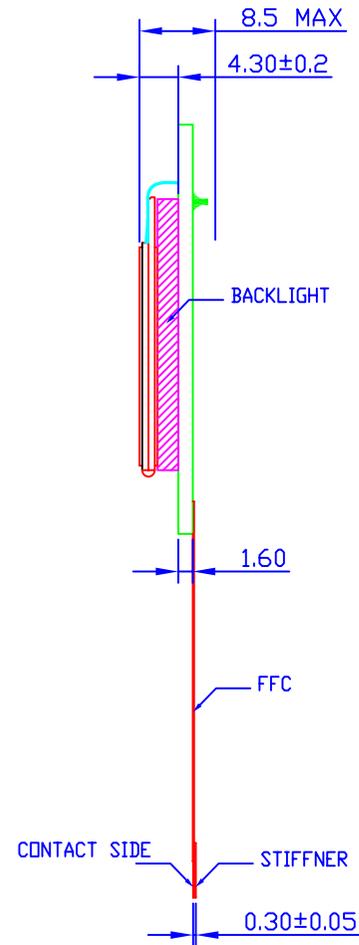


REV.	CHANGE CONTENT	BY	DATE

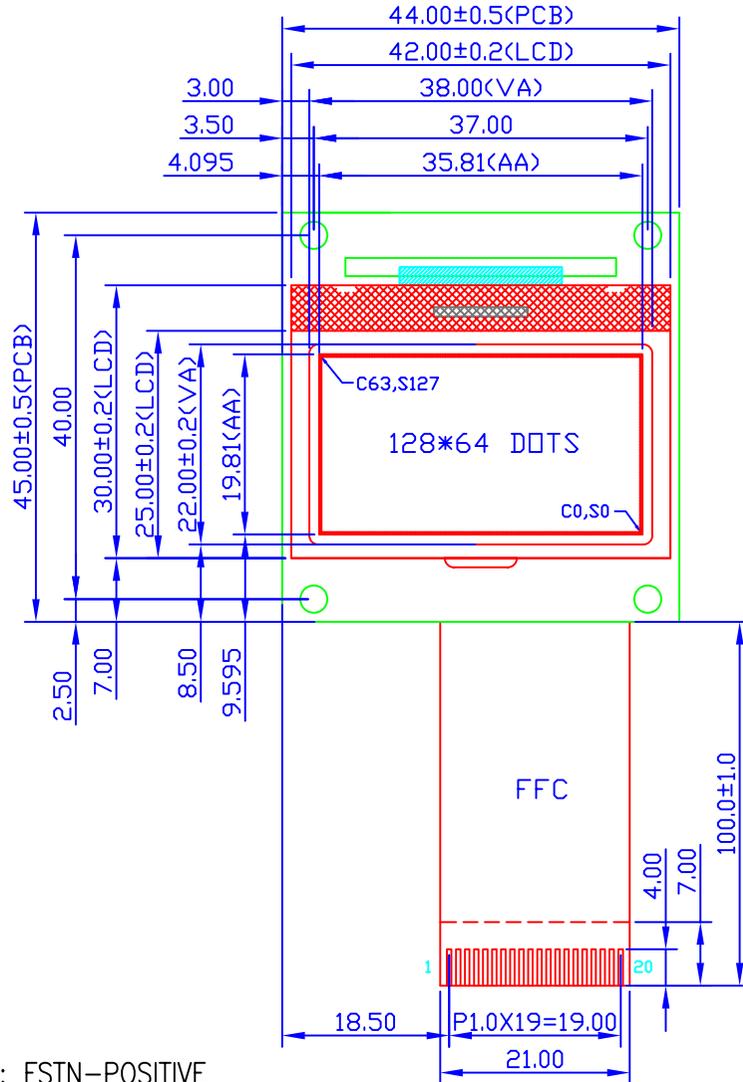

1	NC
2	NC
3	NC
4	NC
5	VSS
6	VDD
7	DB7
8	DB6
9	DB5
10	DB4
11	DB3
12	DB2
13	DB1
14	DB0
15	E
16	R/W
17	A0
18	/RES
19	/CS
20	VLED



LCD PIN	NT7532 Pin
C0~C31	C31~C0
C32~C63	C63~C32
S0~S127	S0~S127

NOTE:

- LCD TYPE: FSTN-POSITIVE
- POLARIZER MODE: TRANSFLECTIVE
- DRIVE METHOD: 1/64 DUTY, 1/9 BIAS,  $V_{op}=8.75V$
- VIEWING DIR.: 12:00
- OP. TEMP.:  $-20^{\circ}C \sim 70^{\circ}C$
- ST. TEMP.:  $-30^{\circ}C \sim 80^{\circ}C$
- BACKLIGHT: WHITE,  $V_f=4.0V$ ,  $I_f=40mA$
- LCD CONTROLLER: NT7532,  $V_{DD}=3.0V$



深圳市华远显示器件有限公司  
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No.:HYG1286422G-FFC2L-VC

DRAWING TITLE : LCM

FILE NO.: 8

DESIGN	TECHNOLOGY	REV. : A	SCALE : -
CHECKED	Q.A	PROJECTION:	UNIT : MM
STANDARD	APPROVED		SHEET : 1/1