


REV.	CHANGE CONTENT	BY	DATE

A  
B  
C  
D  
E  
F

A  
B  
C  
D  
E  
F

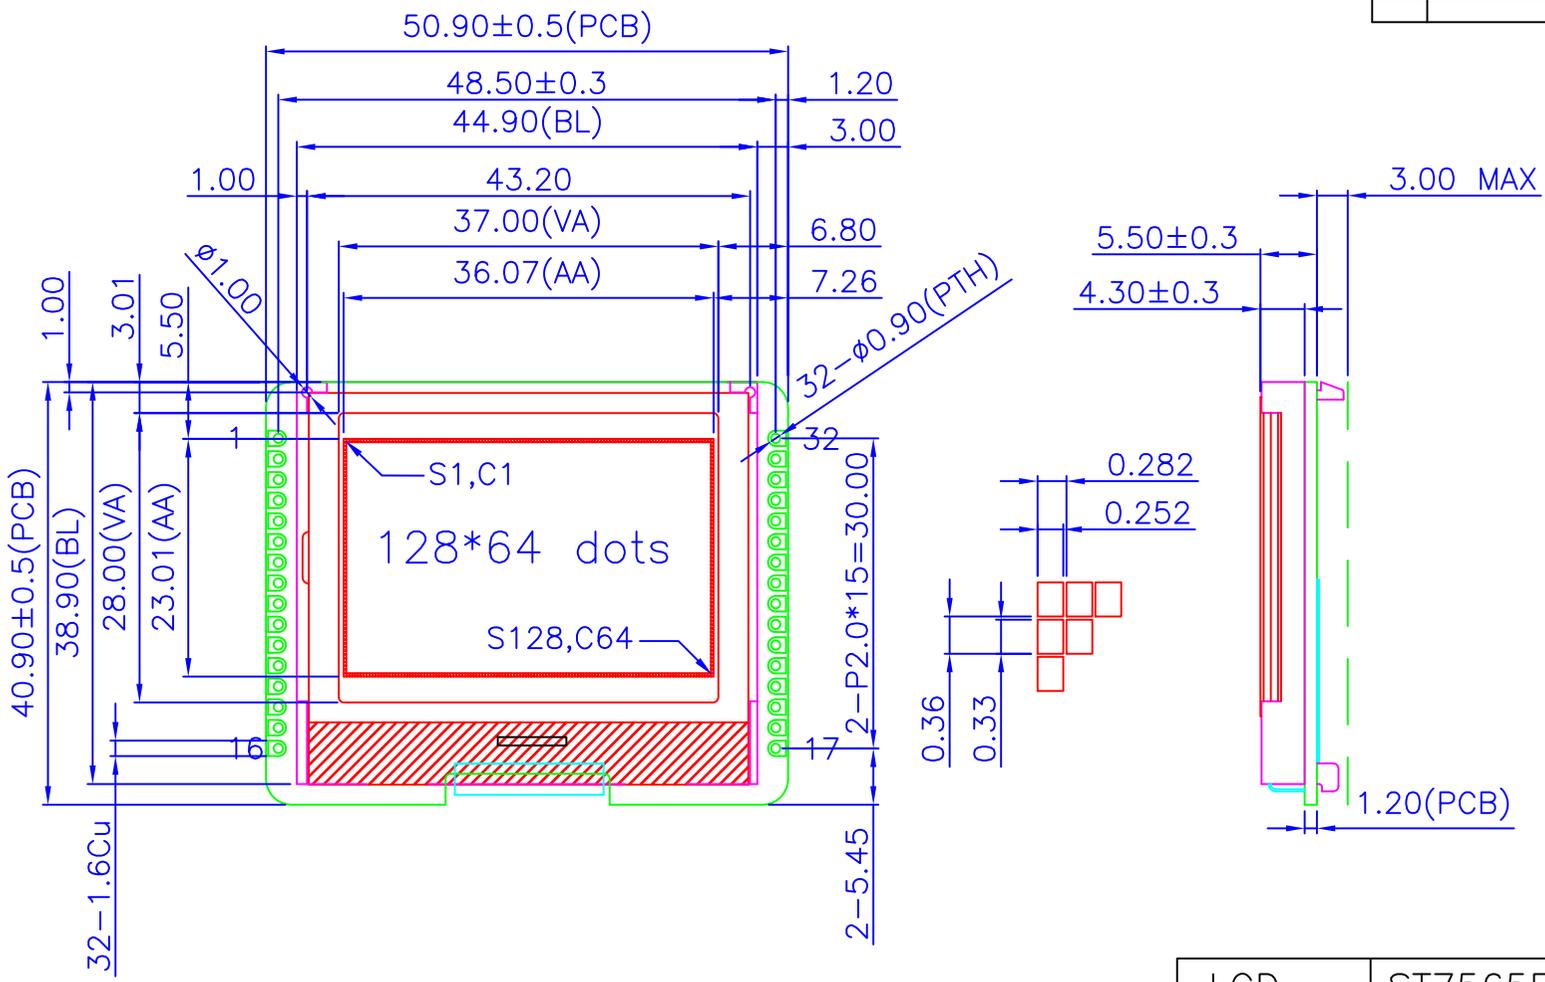

1	/CS
2	/RES
3	RS
4	R/W
5	E
6	D0
7	D1
8	D2
9	D3
10	D4
11	D5
12	D6(SCL)
13	D7(SI)
14	VDD
15	VSS
16	BLA
17	NC
⋮	⋮
32	NC

NOTE:

- LCD TYPE: FSTN-POSITIVE
- POLARIZER MODE: TRANSFLECTIVE
- DRIVE METHOD: 1/65 DUTY, 1/9 BIAS, Vop=9.9V
- VIEWING DIR.: 6:00
- OP. TEMP.: -20°C~70°C
- ST. TEMP.: -30°C~80°C
- BACKLIGHT: WHITE, Vf=3.3V, If=30mA
- LCD CONTROLLER: ST7565P, VDD=3.3V

LCD	ST7565P
SEG1-SEG128	SEG0-SEG127
COM1-COM64	COM63-COM0

	深圳市华远显示器件有限公司 SHENZHEN HUAYUAN DISPLAY CO., LTD		DRAWING No.: HYG1286493G-FF62L-VA DRAWING TITLE : LCM FILE NO.: 8	
	DESIGN	TECHNOLOGY	REV. : A	SCALE : -
	CHECKED	Q.A	PROJECTION:	UNIT : MM
	STANDARD	APPROVED		SHEET : 1/1