


REV.	CHANGE CONTENT	BY	DATE

A  
B  
C  
D  
E  
F

A  
B  
C  
D  
E  
F

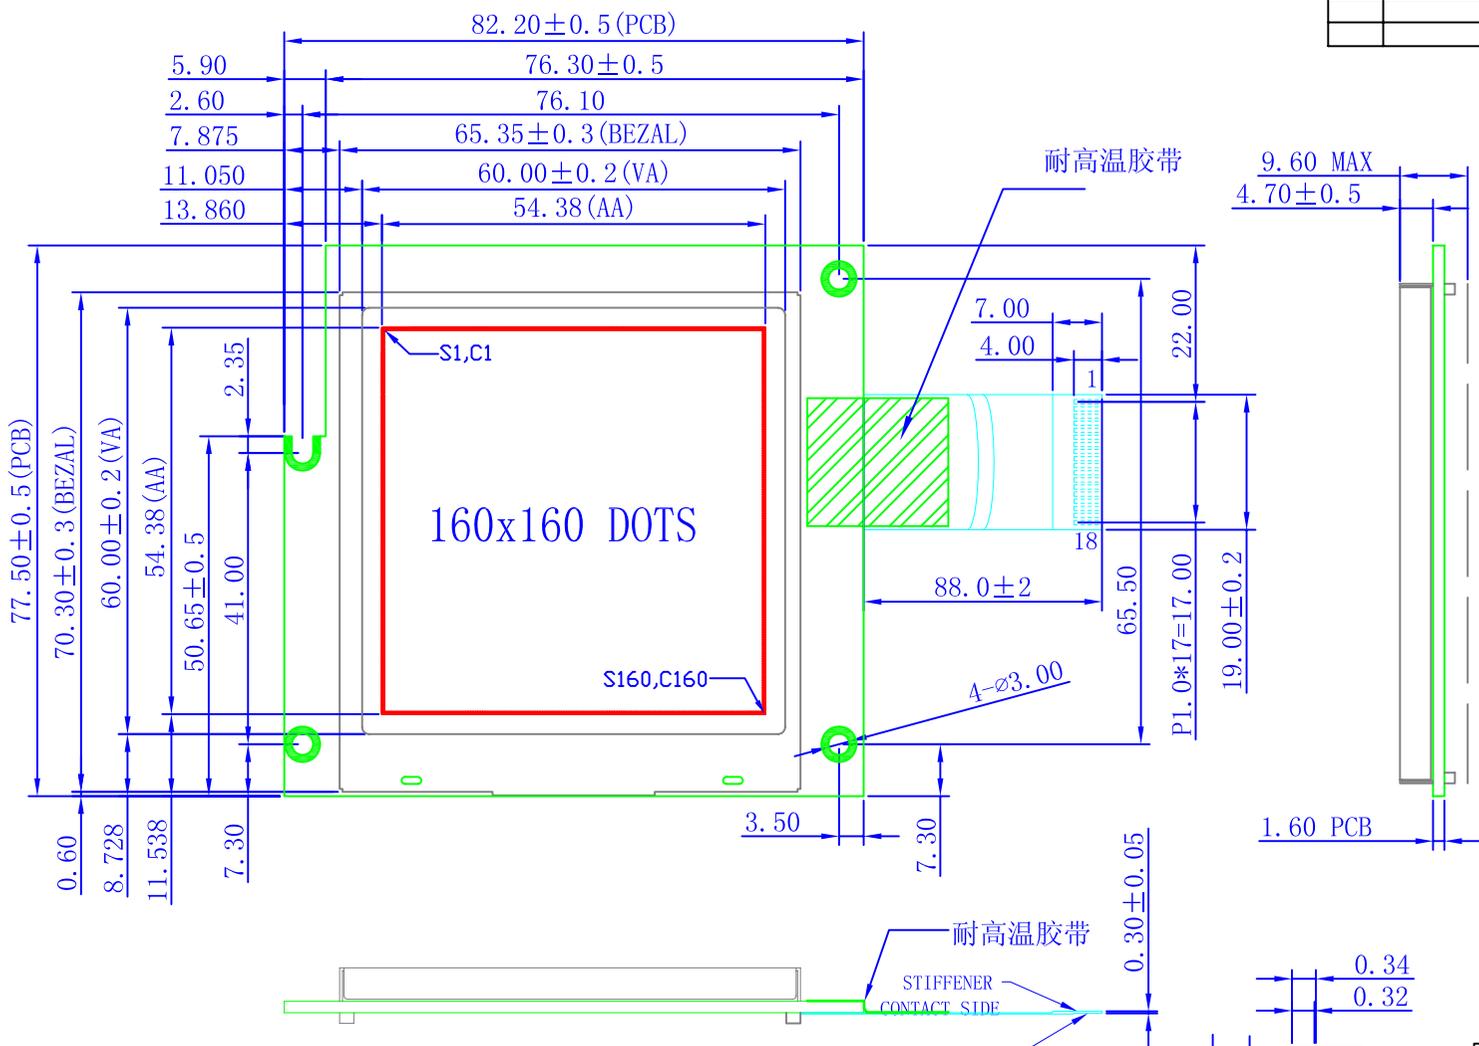

NO	NAME
1	VSS
2	A0
3	/WR
4	/RD
5	/CS
6	/RST
7	VDD
8	DB0
9	DB1
10	DB2
11	DB3
12	DB4
13	DB5
14	DB6
15	DB7
16	BLK
17	NC
18	BLA

NOTE:

- LCD TYPE: FSTN-POSITIVE
- POLARIZER MODE: TRANSFLECTIVE
- DRIVE METHOD: 1/160 DUTY, 1/10 BIAS, Vop=16.5V
- VIEWING DIR.: 6:00
- OP. TEMP.: -30°C~75°C
- ST. TEMP.: -40°C~90°C
- BACKLIGHT: WHITE, Vf=4.7V, If=90mA
- LCD CONTROLLER: UC1698, VDD=3.3V

LCD	UC1698
SEG1-SEG160	SEG112-SEG271
COM1-COM160	COM160-COM1

	深圳市华远显示器件有限公司 SHENZHEN HUAYUAN DISPLAY CO., LTD		DRAWING No.: HYG16016017G-FF63L-VD DRAWING TITLE: LCM FILE NO.: 8	
	DESIGN	TECHNOLOGY	REV.: A	SCALE: -
	CHECKED	Q.A	PROJECTION:	UNIT: MM
	STANDARD	APPROVED		SHEET: 1/1