


| REV. | CHANGE CONTENT | BY | DATE |
|------|----------------|----|------|
|      |                |    |      |
|      |                |    |      |

A  
B  
C  
D  
E  
F

A  
B  
C  
D  
E  
F

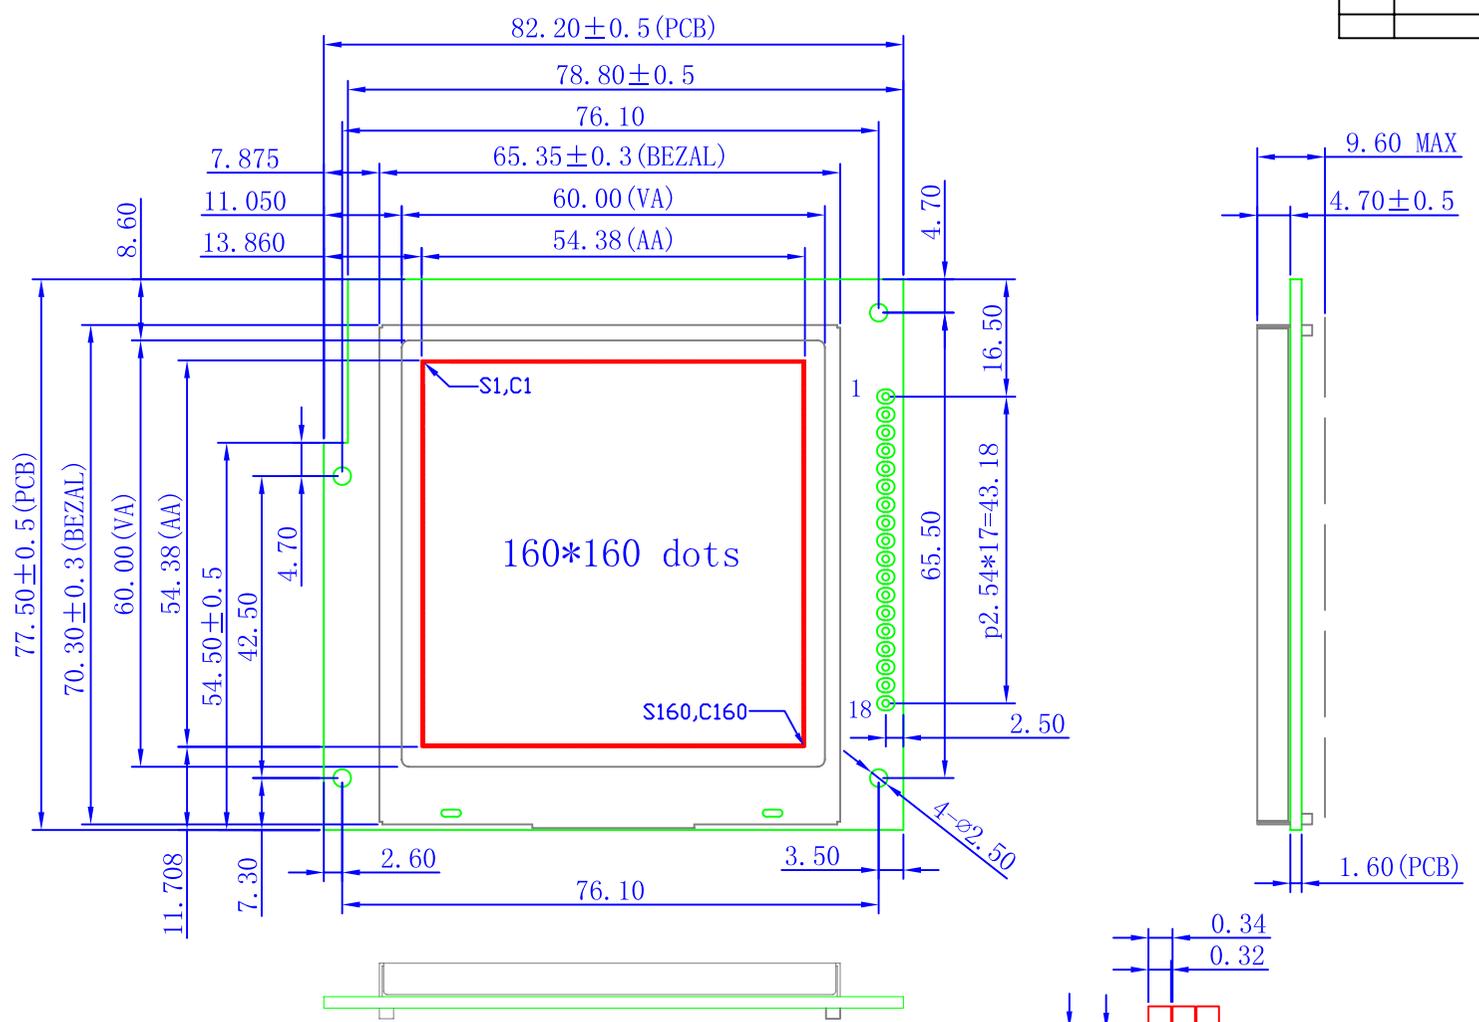

| NO | NAME |
|----|------|
| 1  | VSS  |
| 2  | A0   |
| 3  | /WR  |
| 4  | /RD  |
| 5  | /CS  |
| 6  | /RST |
| 7  | VDD  |
| 8  | DB0  |
| 9  | DB1  |
| 10 | DB2  |
| 11 | DB3  |
| 12 | DB4  |
| 13 | DB5  |
| 14 | DB6  |
| 15 | DB7  |
| 16 | BLK  |
| 17 | NC   |
| 18 | BLA  |

NOTE:

- LCD TYPE: FSTN-POSITIVE
- POLARIZER MODE: TRANFLECTIVE
- DRIVE METHOD: 1/160 DUTY, 1/10 BIAS, Vop=16.5V
- VIEWING DIR.: 6:00
- OP. TEMP.: -20°C~70°C
- ST. TEMP.: -30°C~80°C
- BACKLIGHT: WHITE, Vf=3.3V, If=90mA
- LCD CONTROLLER: UC1698, VDD=3.3V

|             |               |
|-------------|---------------|
| LCD         | UC1698        |
| SEG1-SEG160 | SEG112-SEG271 |
| COM1-COM160 | COM160-COM1   |

|  |  |  |            |   |             |            |
|--|--|--|------------|---|-------------|------------|
|  | 深圳市华远显示器件有限公司<br>SHENZHEN HUAYUAN DISPLAY CO., LTD |  |            | DRAWING No.: HYG16016024G-FF62L-VA<br>DRAWING TITLE: LCM<br>FILE NO.: 8 |             |            |
|  | DESIGN   |  | TECHNOLOGY |   | REV.: A     | SCALE: -   |
|  | CHECKED  |  | Q.A        |   | PROJECTION: | UNIT: MM   |
|  | STANDARD   |  | APPROVED   |   |             | SHEET: 1/1 |

1 2 3 4 5 6 7 8