


REV.	CHANGE CONTENT	BY	DATE

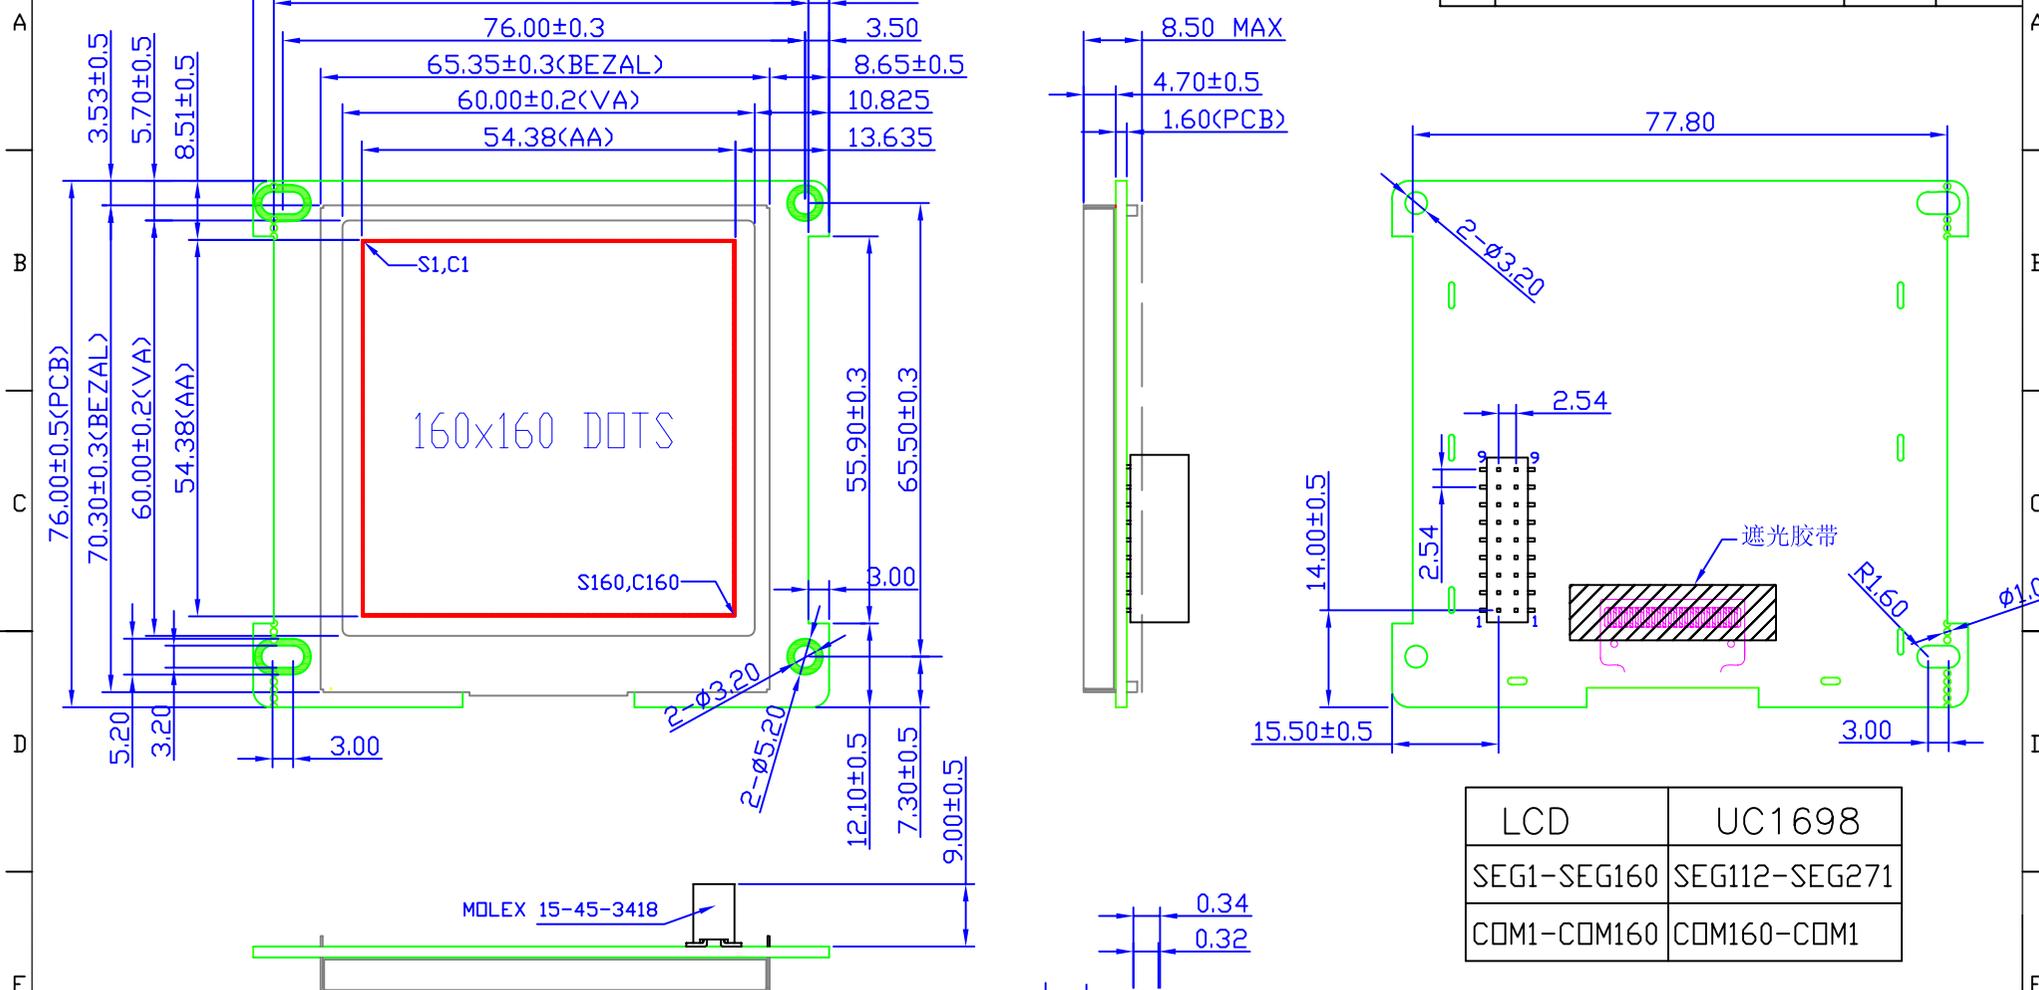

NOTE:

- LCD TYPE: FSTN-POSITIVE
- POLARIZER MODE: TRANSFLECTIVE
- DRIVE METHOD: 1/160 DUTY, 1/10 BIAS, $V_{op}=16.5V$
- VIEWING DIR.: 6:00
- OP. TEMP.: $-30^{\circ}C \sim 80^{\circ}C$
- ST. TEMP.: $-40^{\circ}C \sim 90^{\circ}C$
- BACKLIGHT: WHITE, $V_f=3.3V$, $I_f=90mA$
- LCD CONTROLLER: UC1698, $V_{DD}=3.3V$

LCD	UC1698
SEG1-SEG160	SEG112-SEG271
COM1-COM160	COM160-COM1

1	2	3	4	5	6	7	8	9
SDA	VSS	SCK	/RST	A0	/CS	VDD	BLA	BLK

	深圳市华远显示器件有限公司 SHENZHEN HUAYUAN DISPLAY CO., LTD				DRAWING No.: HYGI6016032G-FF63L-VA DRAWING TITLE: LCM FILE NO.: 8			
	DESIGN		TECHNOLOGY		REV. : A	SCALE : -		
	CHECKED		Q.A		PROJECTION:	UNIT : MM		
	STANDARD		APPROVED			SHEET : 1/1		