


REV.	CHANGE CONTENT	BY	DATE

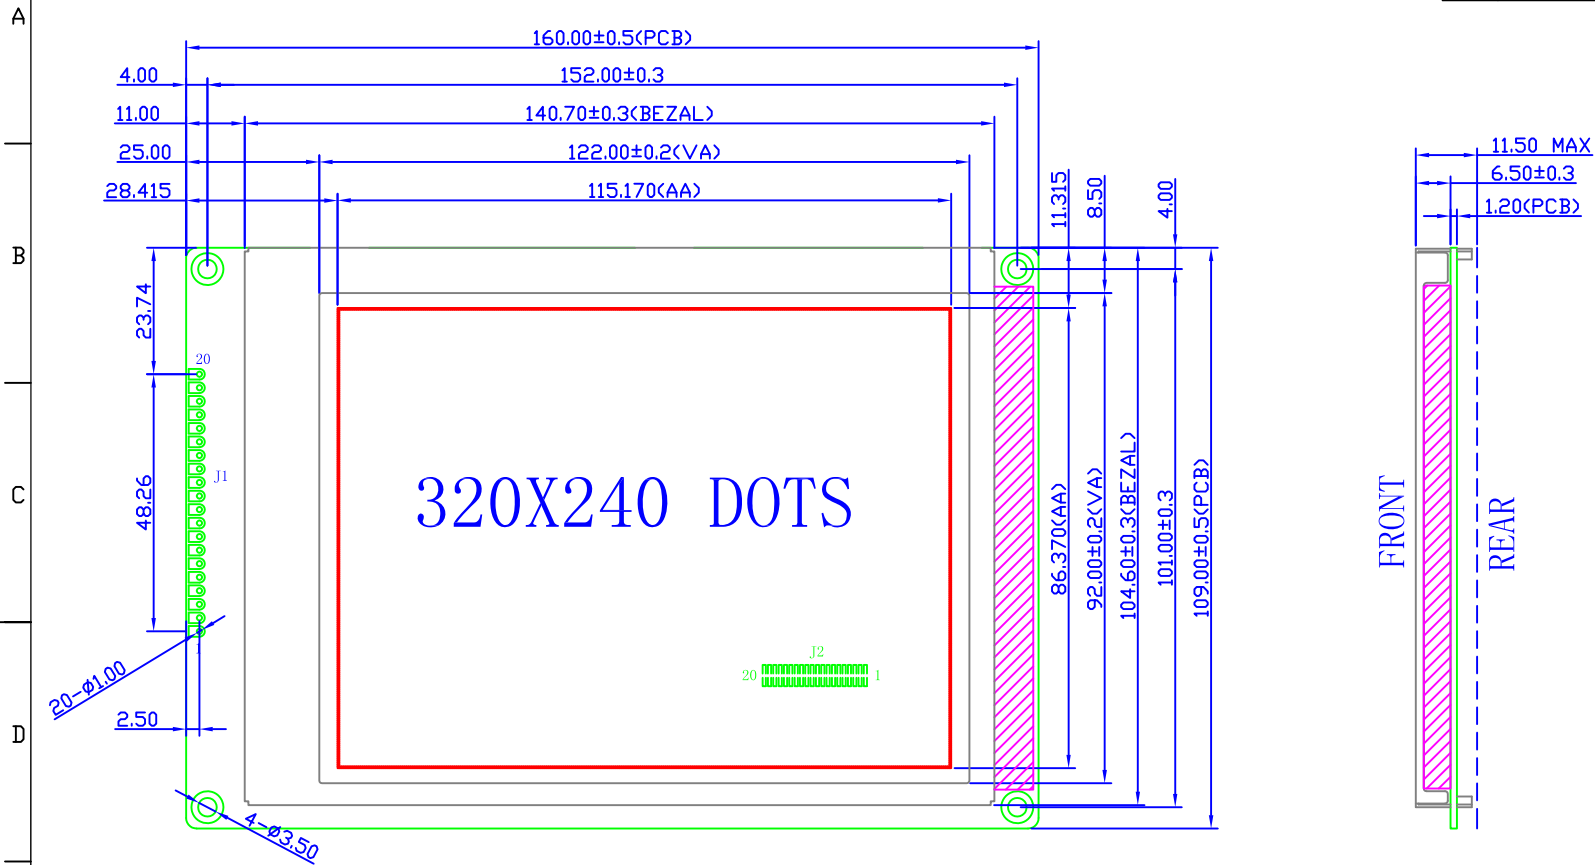


J1, J2:

PIN	SYMBOL
1	VSS
2	VDD
3	V0
4	/WR
5	/RD
6	/CS
7	A0
8	/RST
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	BLA
18	VOUT
19	BLA
20	BLK

NOTE:

- LCD TYPE: FSTN-POSITIVE
- POLARIZER MODE: TRANSMISSIVE-ANTI UV
- DRIVE METHOD: 1/240 DUTY, 1/16 BIAS, $V_{op}=24.0V$
- VIEWING DIR.: 12:00
- OP. TEMP.: $-20^{\circ}C \sim 70^{\circ}C$
- ST. TEMP.: $-30^{\circ}C \sim 80^{\circ}C$
- BACKLIGHT: WHITE, $V_f=5.0V$, $I_f=200mA$
- LCD CONTROLLER: RA8835AP3N, $VDD=5.0V$



	深圳市华远显示器件有限公司 SHENZHEN HUAYUAN DISPLAY CO., LTD		DRAWING No.: HYG32024027T-FFC2L-VD DRAWING TITLE : LCM FILE NO.: 8	
	DESIGN		TECHNOLOGY	
CHECKED		Q.A		REV. : A
STANDARD		APPROVED		PROJECTION:
				SCALE : -
				UNIT : MM
				SHEET : 1/1