


6	7	8
REV.	CHANGE CONTENT	BY

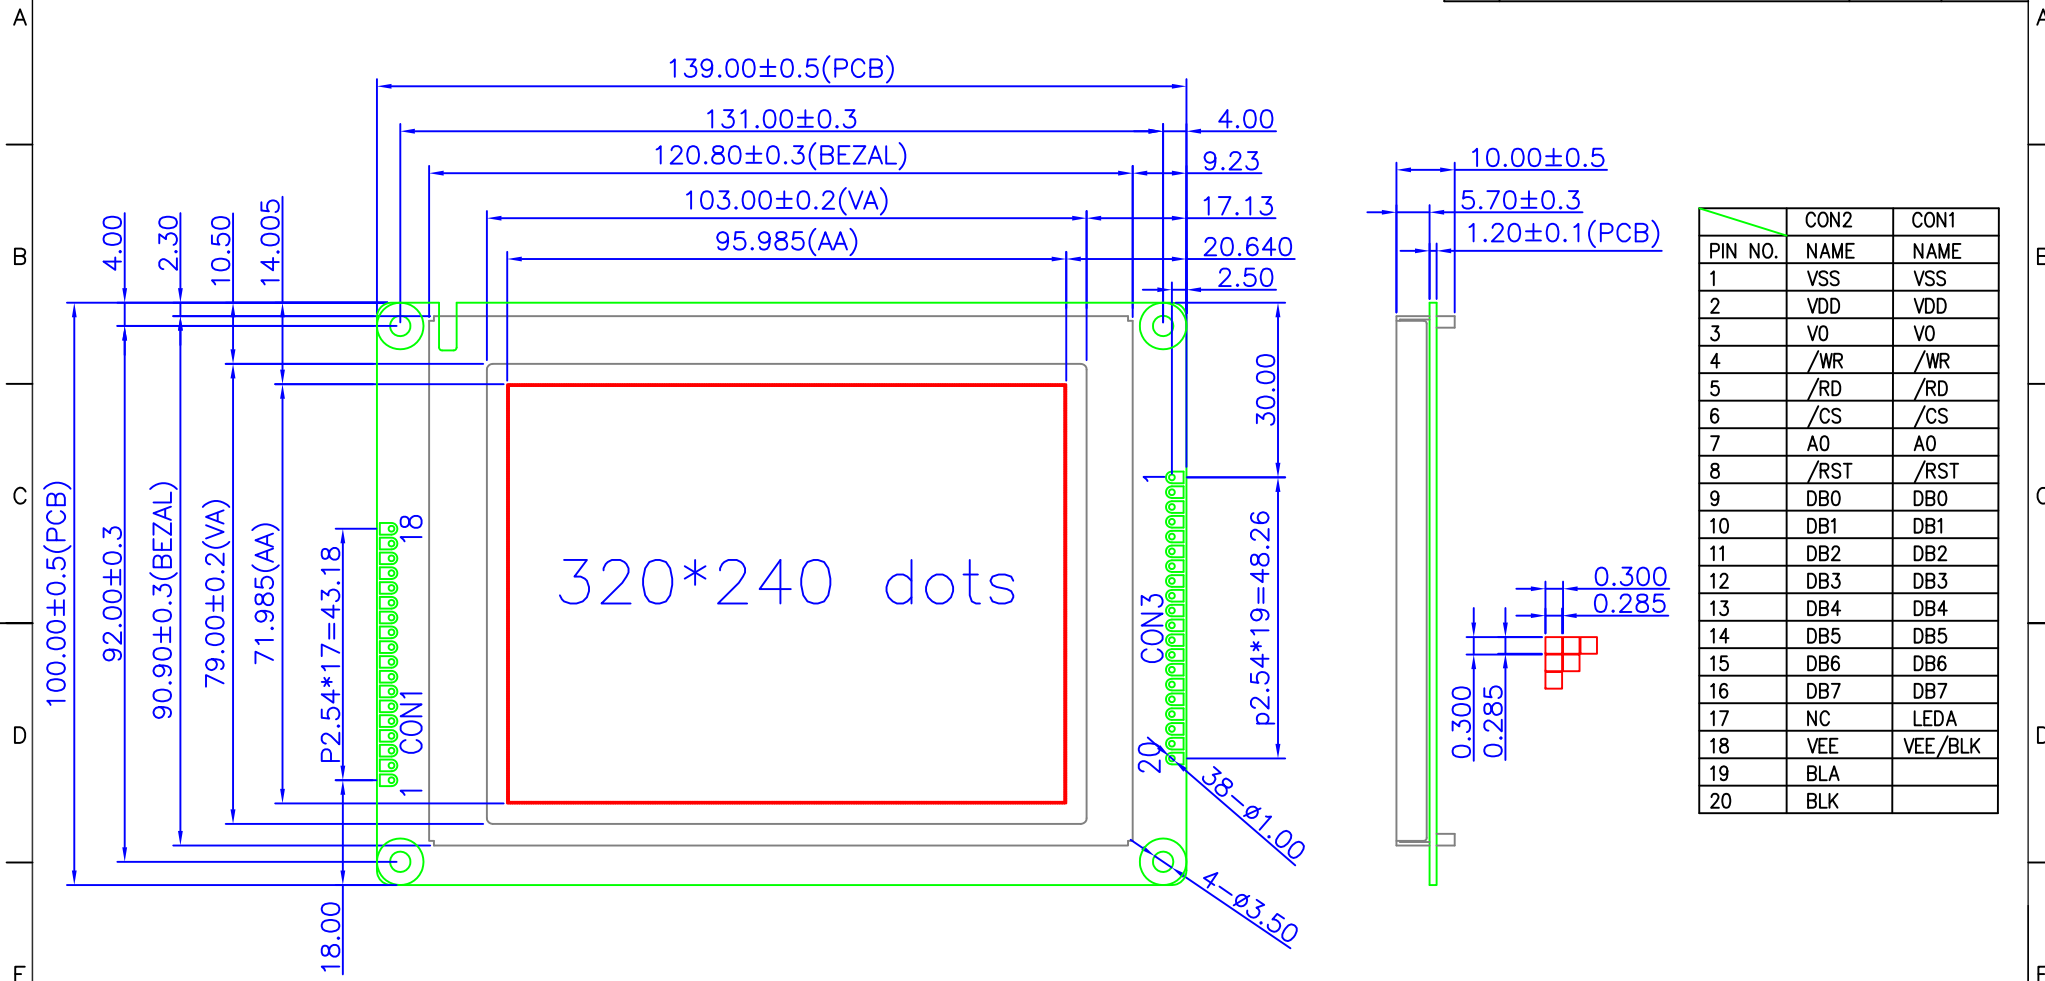

	CON2	CON1
PIN NO.	NAME	NAME
1	VSS	VSS
2	VDD	VDD
3	V0	V0
4	/WR	/WR
5	/RD	/RD
6	/CS	/CS
7	A0	A0
8	/RST	/RST
9	DB0	DB0
10	DB1	DB1
11	DB2	DB2
12	DB3	DB3
13	DB4	DB4
14	DB5	DB5
15	DB6	DB6
16	DB7	DB7
17	NC	LEDA
18	VEE	VEE/BLK
19	BLA	
20	BLK	

NOTE:

- LCD TYPE: STN-NEGATIVE-BLUE
- POLARIZER MODE: TRANSMISSIVE
- DRIVE METHOD: 1/240 DUTY, 1/14 BIAS, Vop=21.0V
- VIEWING DIR.: 6:00
- OP. TEMP.: -20°C~70°C
- ST. TEMP.: -30°C~80°C
- BACKLIGHT: WHITE, Vf=5.0V, If=200mA
- LCD CONTROLLER: RA8835AP3N, VDD=5.0V

	深圳市华远显示器件有限公司 SHENZHEN HUAYUAN DISPLAY CO., LTD			DRAWING No.: HYG32024028G-bT62L-VA DRAWING TITLE : LCM FILE NO.: 8		
	DESIGN		TECHNOLOGY		REV. : A	SCALE : -
	CHECKED		Q.A		PROJECTION:	UNIT : MM
	STANDARD		APPROVED			SHEET : 1/1