


| REV. | CHANGE CONTENT | BY | DATE |
|------|----------------|----|------|
| | | | |
| | | | |

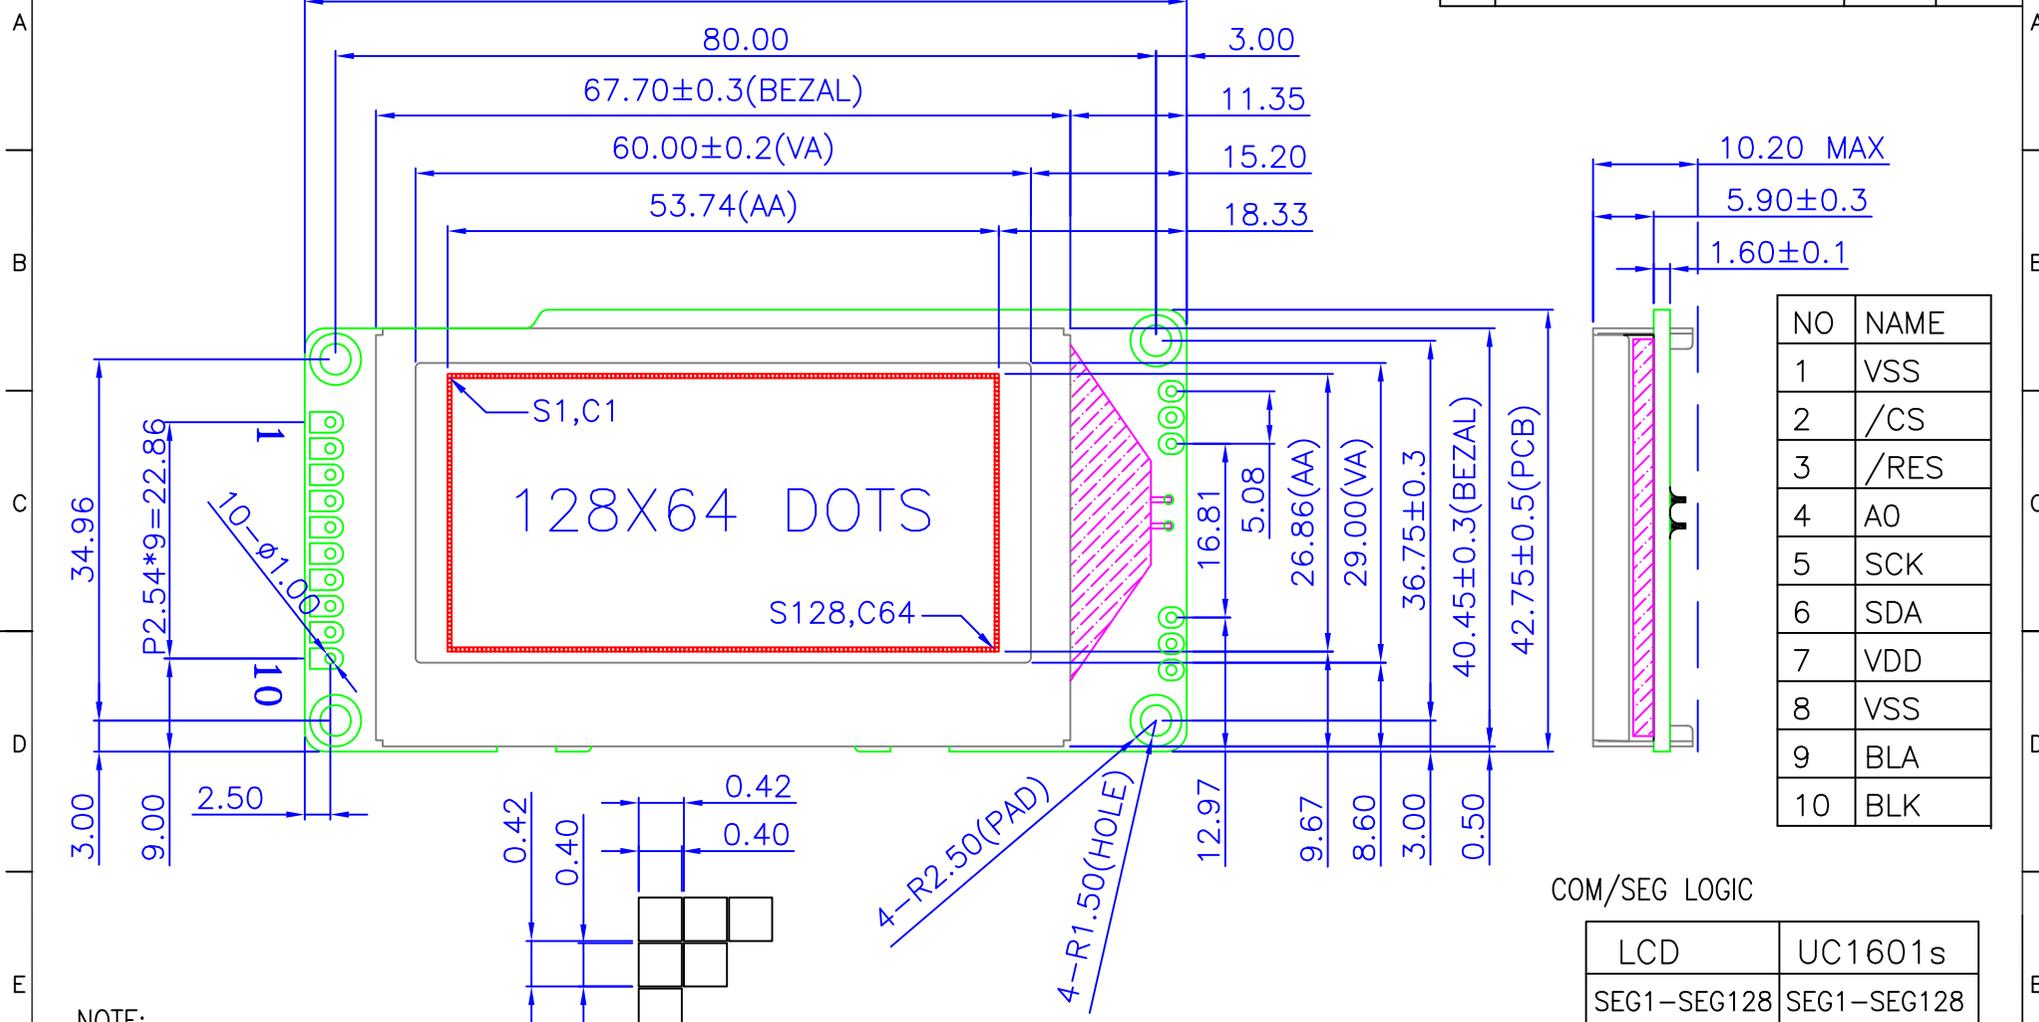

| NO | NAME |
|----|------|
| 1 | VSS |
| 2 | /CS |
| 3 | /RES |
| 4 | A0 |
| 5 | SCK |
| 6 | SDA |
| 7 | VDD |
| 8 | VSS |
| 9 | BLA |
| 10 | BLK |

COM/SEG LOGIC

| | |
|-------------|-------------|
| LCD | UC1601s |
| SEG1-SEG128 | SEG1-SEG128 |
| COM1-COM64 | COM64-COM1 |

- NOTE:
- LCD TYPE: STN-POSITIVE-Y/G
 - POLARIZER MODE: TRANSMISSIVE
 - DRIVE METHOD: 1/65 DUTY, 1/9 BIAS, Vop=11.0V
 - VIEWING DIR.: 6:00
 - OP. TEMP.: -20°C~70°C
 - ST. TEMP.: -30°C~80°C
 - BACKLIGHT: GREEN, Vf=3.3V, If=10mA
 - LCD CONTROLLER: UC1601s, VDD=3.3V

| | | | | |
|--|--|------------|---|-------------|
| | 深圳市华远显示器件有限公司 SHENZHEN HUAYUAN DISPLAY CO., LTD | | DRAWING No.: HYG1286494G-YT62L-VA DRAWING TITLE : LCM FILE NO.: 8 | |
| | DESIGN | TECHNOLOGY | REV. : A | SCALE : - |
| | CHECKED | Q.A | PROJECTION: | UNIT : MM |
| | STANDARD | APPROVED | | SHEET : 1/1 |