
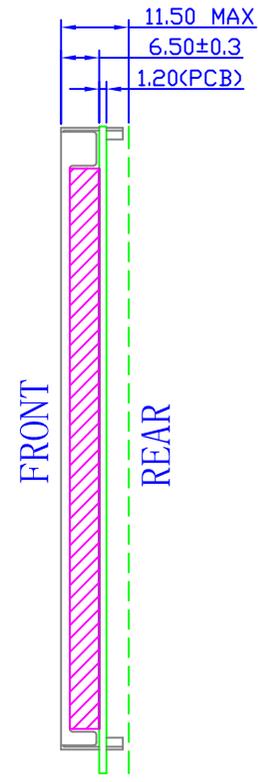



REV.	CHANGE CONTENT	BY	DATE

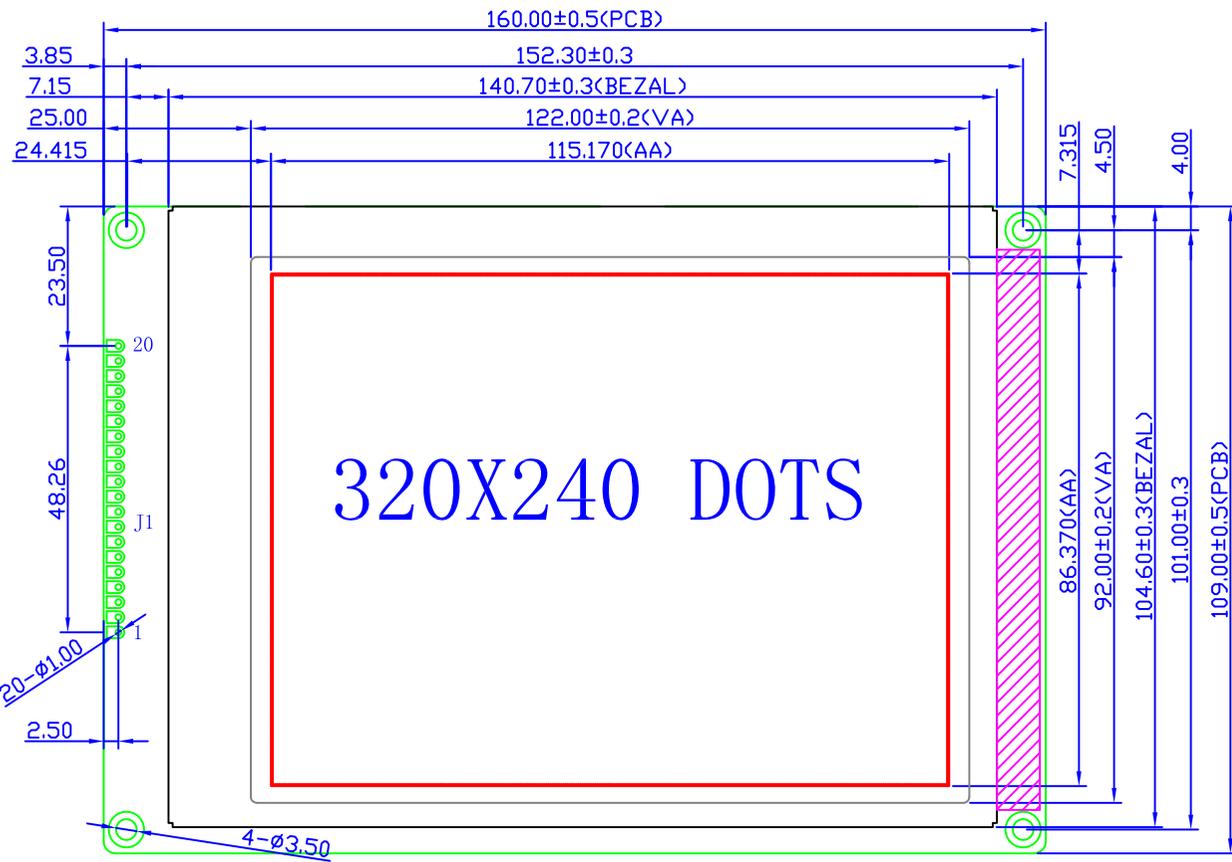

J1

PIN	SYMBOL
1	VSS
2	VDD
3	V0
4	/WR
5	/RD
6	/CS1
7	A0
8	/RST
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	LEDA
18	VOUT
19	INT
20	BUSY

- NOTE:
- LCD TYPE: STN-NEGATIVE-BLUE
  - POLARIZER MODE: TRANSMISSIVE-ANTI UV
  - DRIVE METHOD: 1/240 DUTY, 1/16 BIAS,  $V_{op}=24.0V$
  - VIEWING DIR.: 6:00
  - OP. TEMP.:  $-20^{\circ}C \sim 70^{\circ}C$
  - ST. TEMP.:  $-30^{\circ}C \sim 80^{\circ}C$
  - BACKLIGHT: WHITE,  $V_f=5.0V$ ,  $I_f=200mA$
  - LCD CONTROLLER: RA8806L2N-S,  $VDD=5.0V$



	深圳市华远显示器件有限公司 SHENZHEN HUAYUAN DISPLAY CO., LTD			DRAWING No.: HYG32024032T-bT62L-VA DRAWING TITLE: LCM FILE NO.: 8		
	DESIGN		TECHNOLOGY		REV.: A	SCALE: -
	CHECKED		Q.A		PROJECTION:	UNIT: MM
	STANDARD		APPROVED			SHEET: 1/1