


REV.	CHANGE CONTENT	BY	DATE

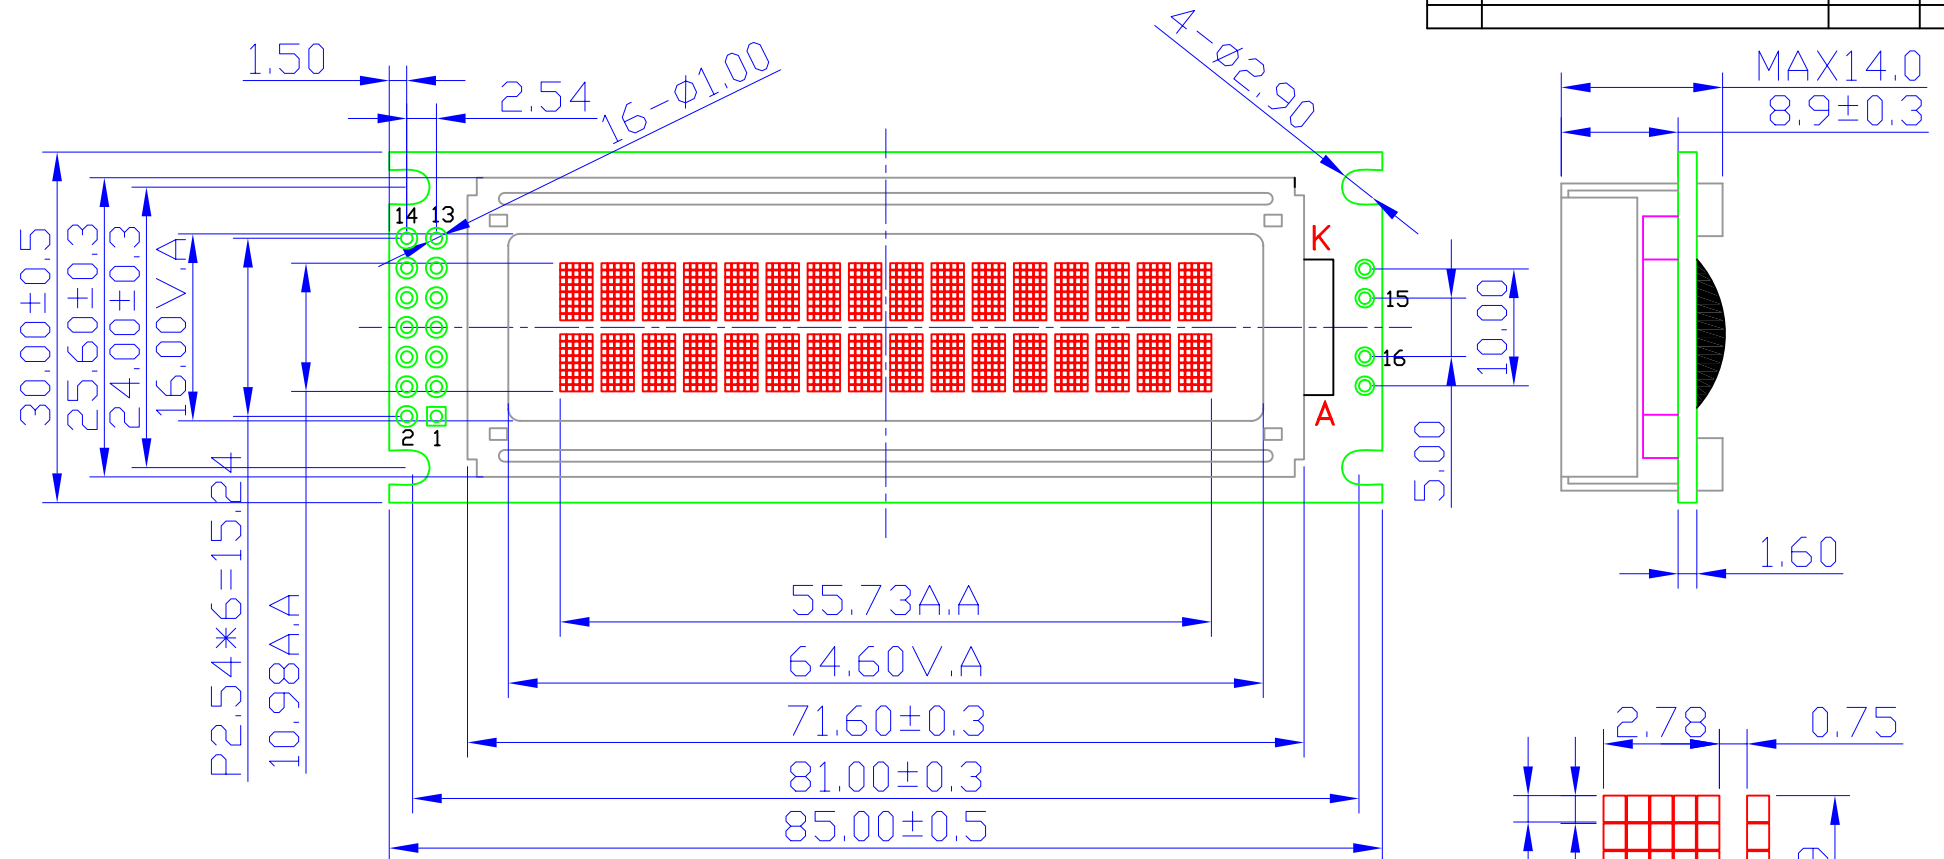

PIN No	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
Symbol	VSS	VDD	VO	A0	R/W	E1	E2	NC	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	BLA	BLK

- NOTE:
1. LCD TYPE: STN-BLUE-NEGATIVE
 2. POLARIZER MODE: TRANSMISSIVE
 3. DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, $V_{op}=4.6V$
 4. VIEWING DIR.: 6:00
 5. OP. TEMP.: $-20^{\circ}C \sim 70^{\circ}C$
 6. ST. TEMP.: $-30^{\circ}C \sim 80^{\circ}C$
 7. BACKLIGHT: COLOR-WHITE, $V_{LED}=5.0 \pm 0.2V$, $I_f=30mA$
 8. DRIVER IC: ST7066U-0A, $V_{DD}=5.0V$

	深圳市华远显示器件有限公司 SHENZHEN HUAYUAN DISPLAY CO., LTD				DRAWING No. HYC160210C-bT62L-VA DRAWING TITLE: LCM	
					FILE NO.: 8	
	DESIGN		STANDARD		REV. : A	SCALE : -
	CHECKED		TECHNOLOGY		PROJECTION:	UNIT : mm
APPROVED		Q.A			SHEET : 1/1	