
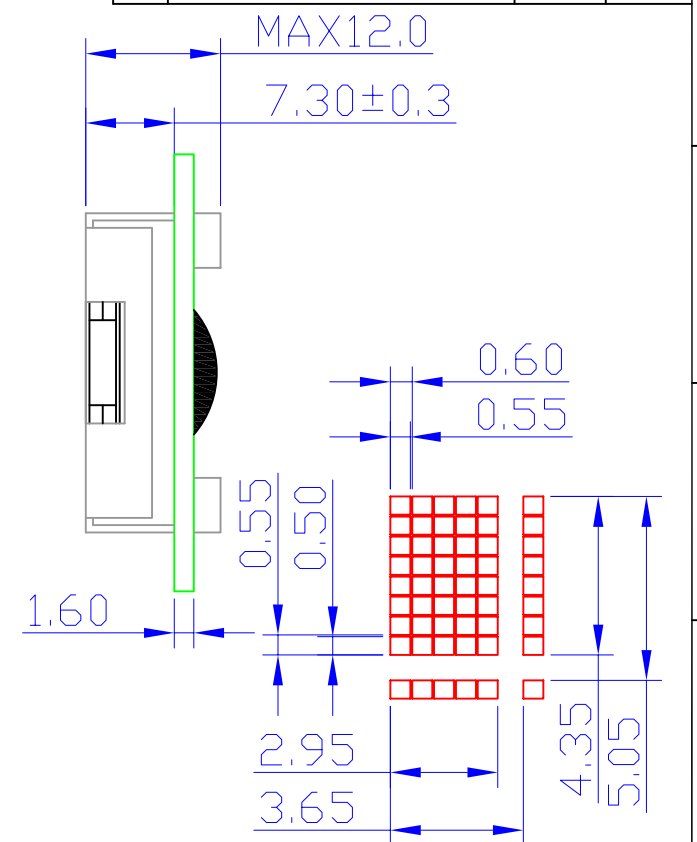


REV.	CHANGE CONTENT	BY	DATE

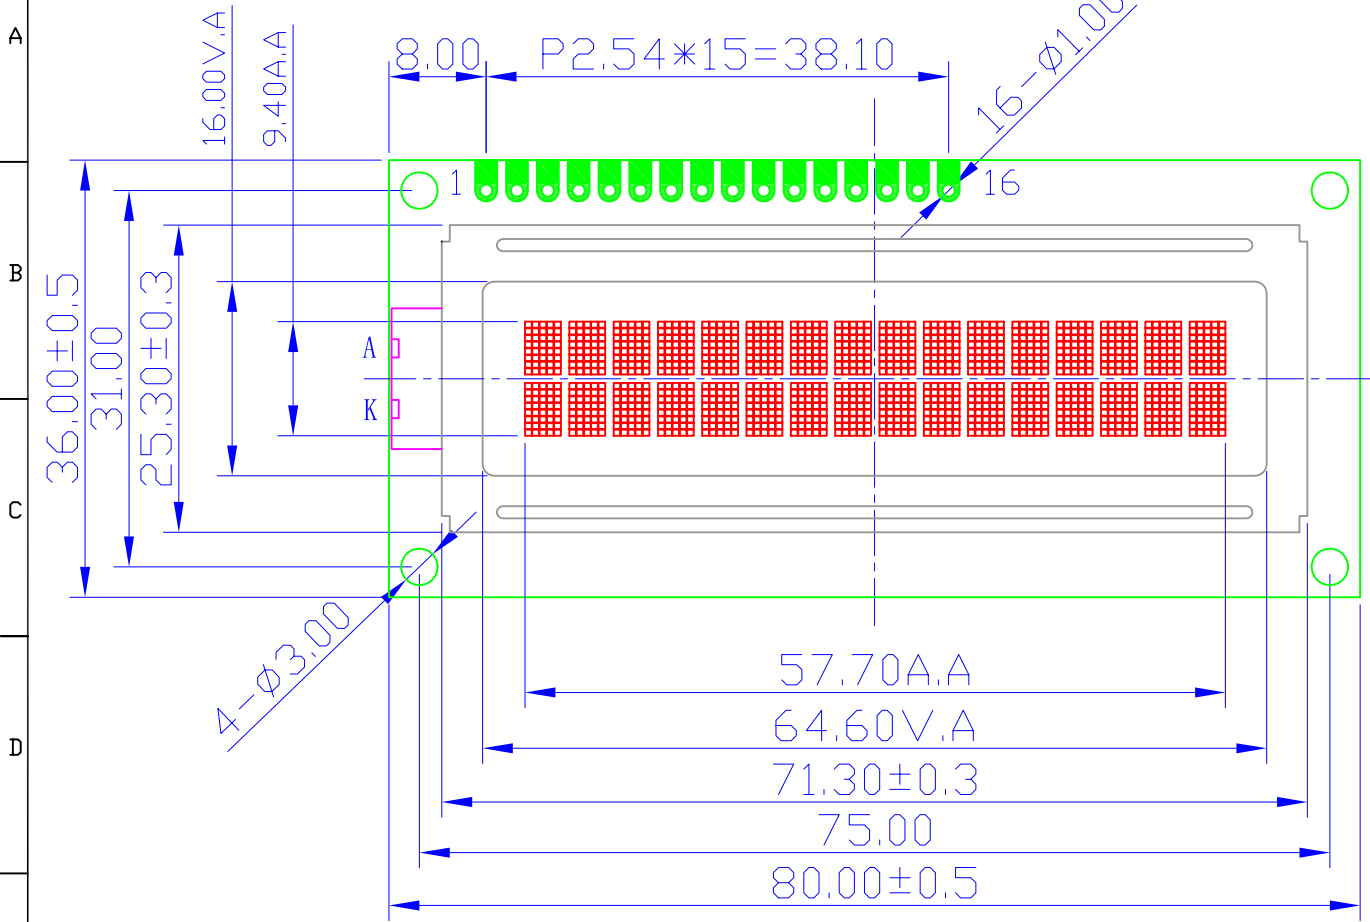

- NOTE:
1. DISPLAY TYPE: STN-Y/G-POSITIVE
 2. DISPLAY MODE: TRANSFLECTIVE
 3. DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, $V_{op}=4.6V$
 4. VIEWING DIR.: 6:00
 5. OP. TEMP.: $-20^{\circ}C \sim 70^{\circ}C$
 6. ST. TEMP.: $-30^{\circ}C \sim 80^{\circ}C$
 7. BACKLIGHT: COLOR-WHITE, $V_f=5.0 \pm 0.2V$, $I_f < 30mA$
 8. DRIVER IC: ST7066U-0A VDD=5.0V

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
SYMBOL	VSS	VDD	V0	RS	R/W	E	D0	D1	D2	D3	D4	D5	D6	D7	BLA	BLK

	深圳市华远显示器件有限公司 SHENZHEN HUAYUAN DISPLAY CO., LTD		DRAWING No. : HYC160221C-bT62L-VB DRAWING TITLE : LCM DRAWING FILE NO. : 8	
	DESIGN		STANDARD	
	CHECKED		TECHNOLOGY	
APPROVED		Q.A		REV. : A PROJECTION:
			SCALE : -	UNIT : mm
			SHEET : 1/1	