


REV.	CHANGE CONTENT	BY	DATE

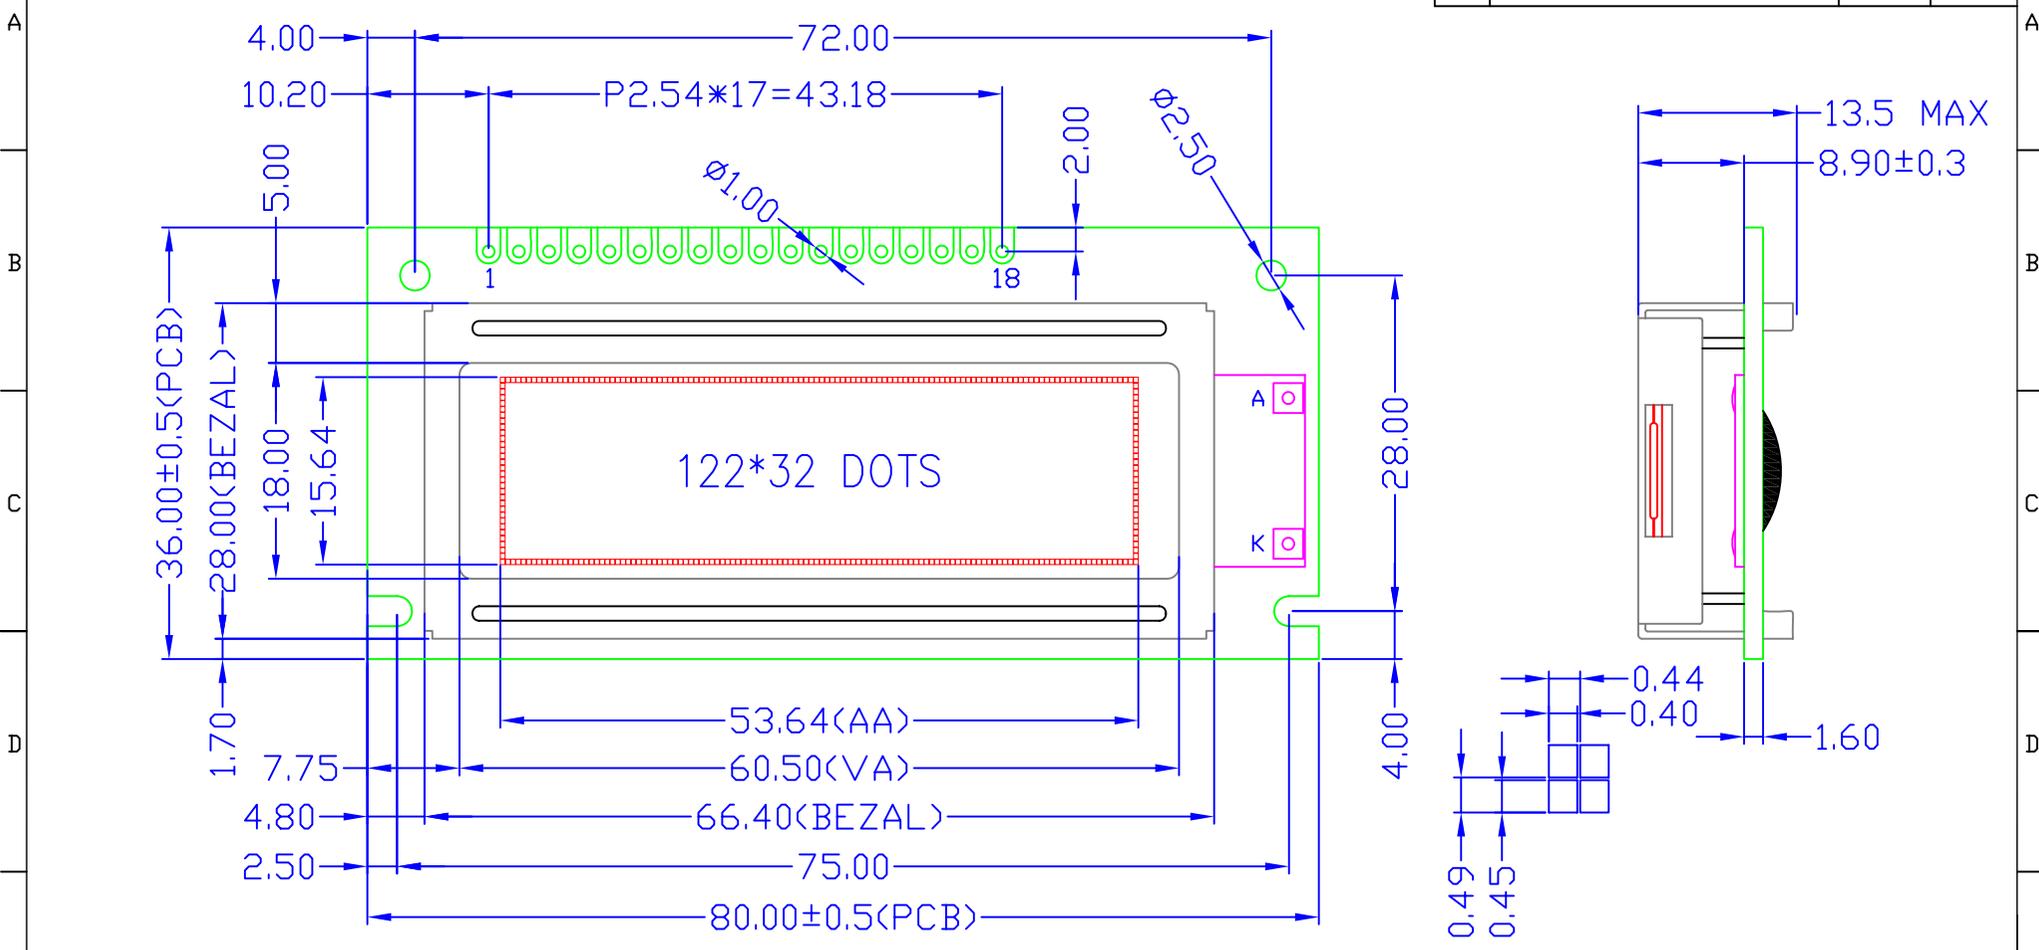

NOTE:

- LCD TYPE: STN-POSITIVE-Y/G
- POLARIZER MODE: TRANSFLECTIVE
- DRIVE METHOD: 1/32 DUTY, 1/6 BIAS,  $V_{op}=5.0V$
- VIEWING DIR.: 6:00
- OP. TEMP.:  $-10^{\circ}C \sim 60^{\circ}C$
- ST. TEMP.:  $-20^{\circ}C \sim 70^{\circ}C$
- BACKLIGHT: Y/G,  $V_f=5.0V$ ,  $I_f=90mA$
- LCD CONTROLLER: SBN1661G,  $VDD=5.0V$

PIN No	1	2	3	4	5	6	7	8-15	16	17	18
Symbol	VSS	VDD	V0	A0	E1	E2	RW	DB0-DB7	/RST	BLA	BLK



深圳市华远显示器件有限公司  
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No. :HYG1223204C-YF61L-VA  
DRAWING TITLE: LCM  
FILE NO. : 8

DESIGN		STANDARD		REV. : A	SCALE : -
CHECKED		TECHNOLOGY		PROJECTION:	UNIT : MM
APPROVED		Q. A			SHEET : 1/1