


REV.	CHANGE CONTENT	BY	DATE

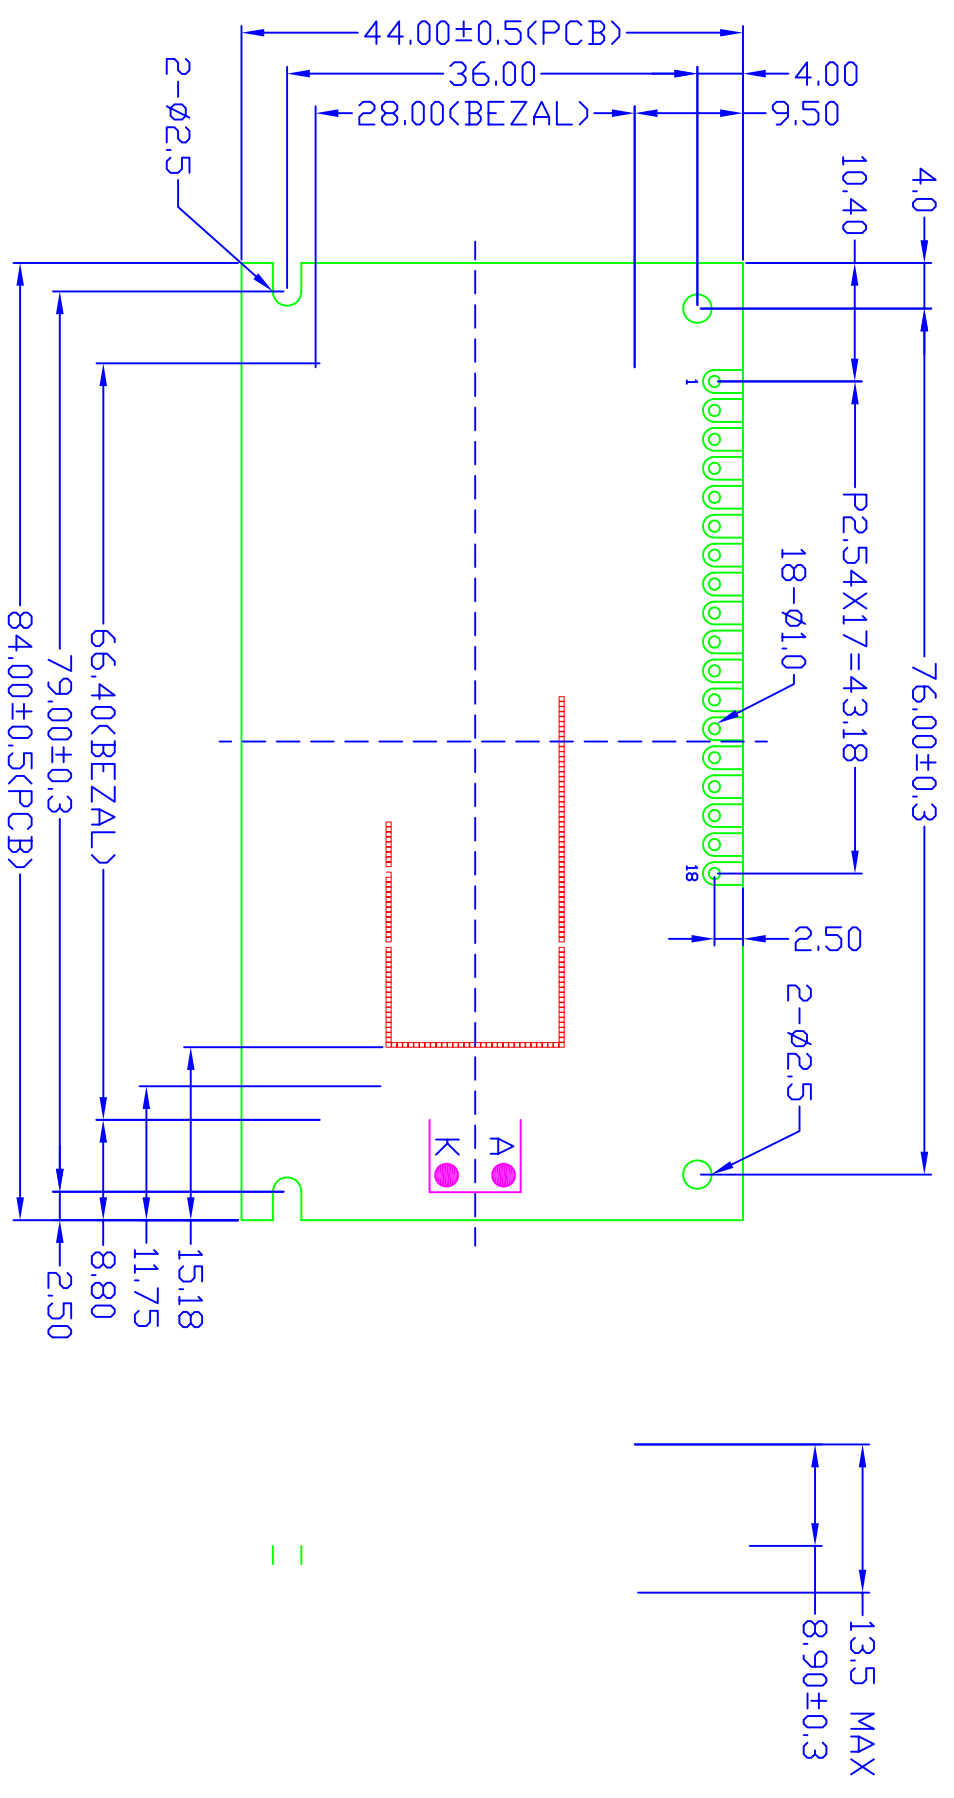

NOTE:

1. LCD TYPE: STN-POSITIVE-Y/G
2. POLARIZER MODE: TRANSELECTIVE
3. DRIVE METHOD: 1/32 DUTY, 1/6 BIAS, Vop=5.0V
4. VIEWING DIR.: 6:00
5. OP. TEMP.: -20°C~70°C
6. ST. TEMP.: -30°C~80°C
7. BACKLIGHT: Y/G, Vf=5.0V, If<90mA
8. LCD CONTROLLER: SBN1661G, VDD=5.0V

PIN No	1	2	3	4	5	6	7	8-15	16	17	18
Symbol	VDD	VSS	V0	/RST	E1	E2	R/W	DB0-DB7	/RST	BLA	BLK



深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No.: HYG1229205C-YF62L-VB
DRAWING TITLE: LCM
FILE NO.: 8

DESIGN	STANDARD	REV. : A	SCALE : -
CHECKED	TECHNOLOGY	PROJECTION:	UNIT : MM
APPROVED	Q.A		SHEET : 1/1