


| | | | |
|------|----------------|----|------|
| REV. | CHANGE CONTENT | BY | DATE |
| | | | |
| | | | |
| | | | |



- NOTE:
- LCD TYPE: STN-Y/G-POSITIVE
 - POLARIZER MODE: TRANFLECTIVE
 - DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, $V_{op}=5.0V$
 - VIEWING DIR.: 6:00
 - OP. TEMP.: $-20^{\circ}C \sim 70^{\circ}C$
 - ST. TEMP.: $-30^{\circ}C \sim 80^{\circ}C$
 - BACKLIGHT: COLOR-Y/G, $V_f=5.0V$, $I_f=480mA$
 - LCD CONTROLLER: ST7066U-0A, $V_{DD}=5.0V$

| | | | | | | | | | | | | | | | | |
|------|-----|-----|----|----|-----|---|----|----|----|----|----|----|----|----|-----|-----|
| PIN | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| NAME | VSS | VDD | V0 | RS | R/W | E | D0 | D1 | D2 | D3 | D4 | D5 | D6 | D7 | BLA | BLK |

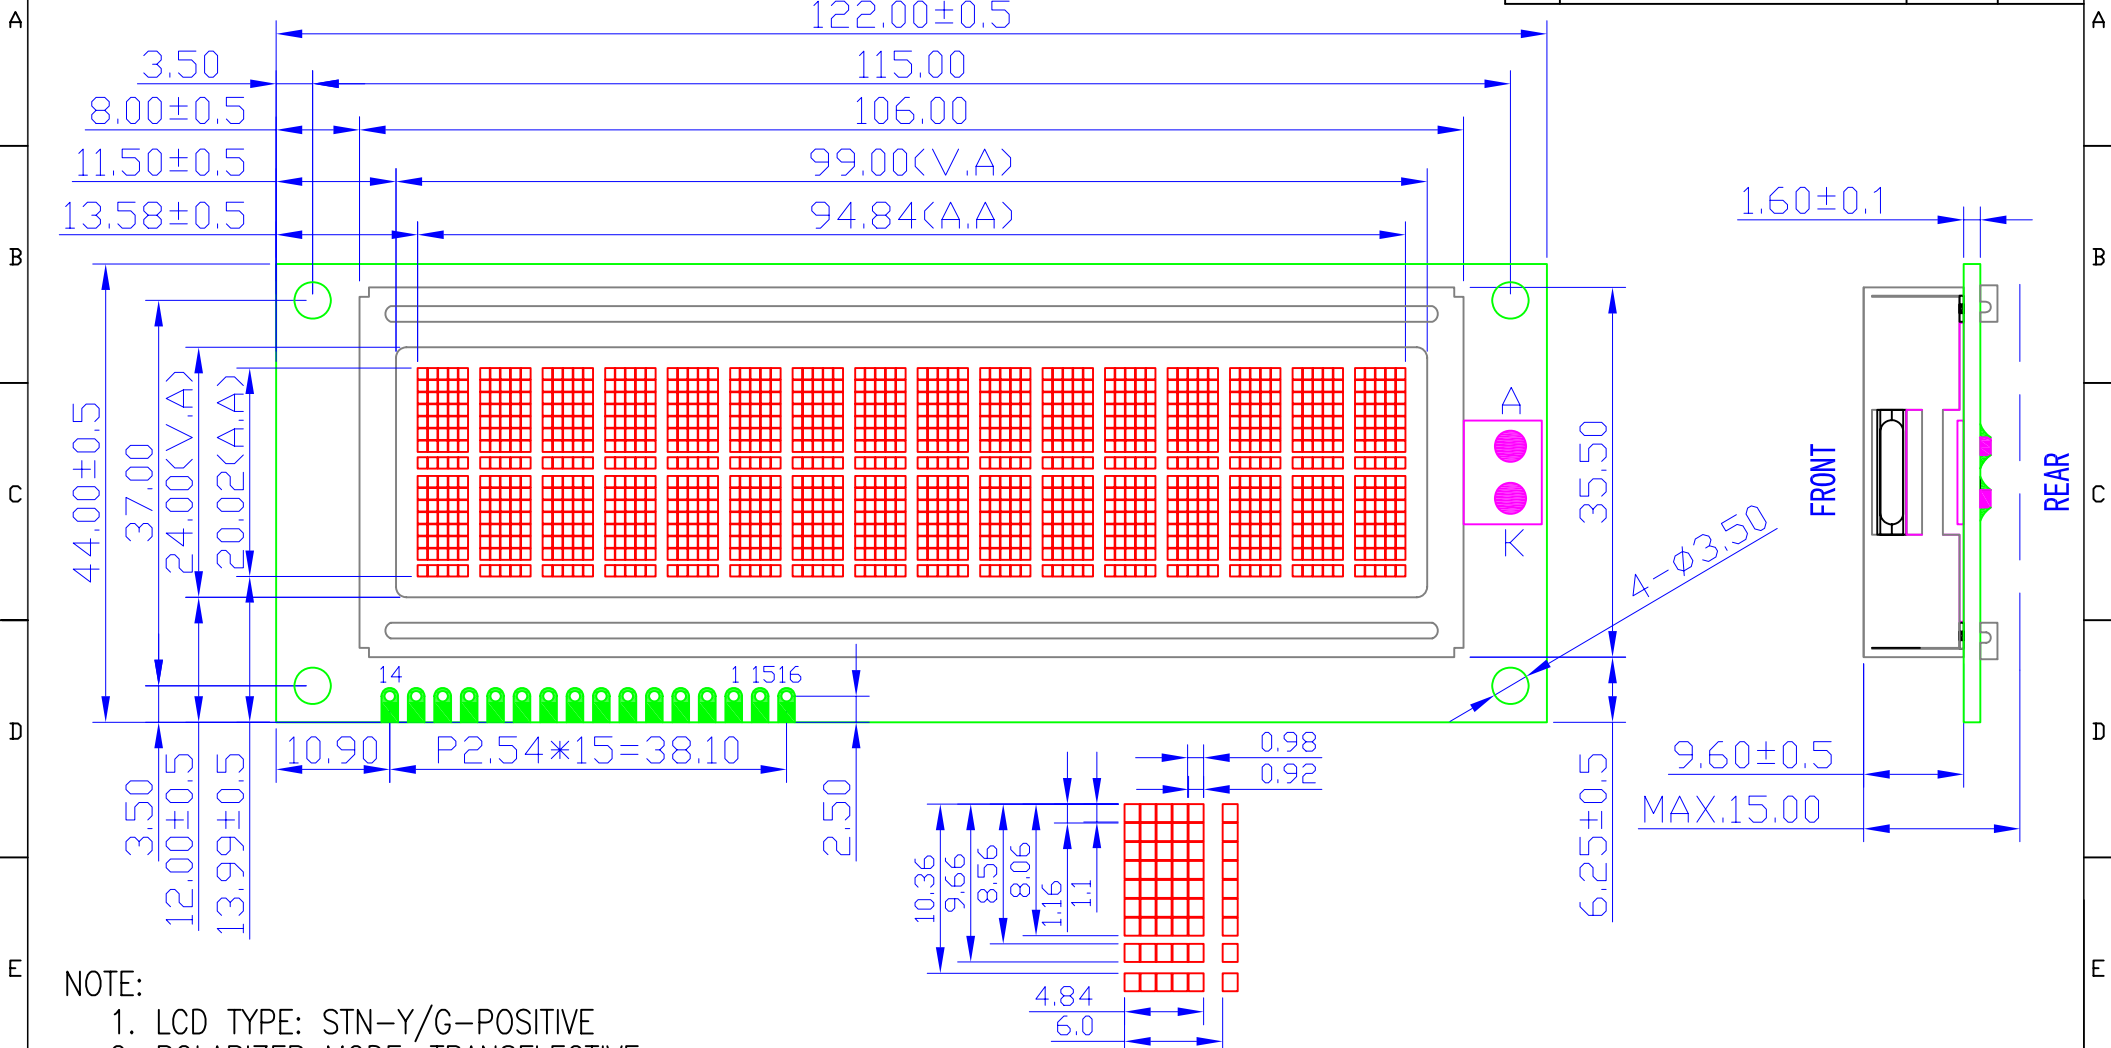

深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No.: HYC160203C-YF62L-VA
DRAWING TITLE: LCM
FILE NO.: 8

| | | | |
|----------|--|------------|--|
| DESIGN | | STANDARD | |
| CHECKED | | TECHNOLOGY | |
| APPROVED | | Q.A | |
| | | | |

| | |
|-------------|-------------|
| REV. : A | SCALE : - |
| PROJECTION: | UNIT : MM |
| | SHEET : 1/1 |