


REV.	CHANGE CONTENT	BY	DATE

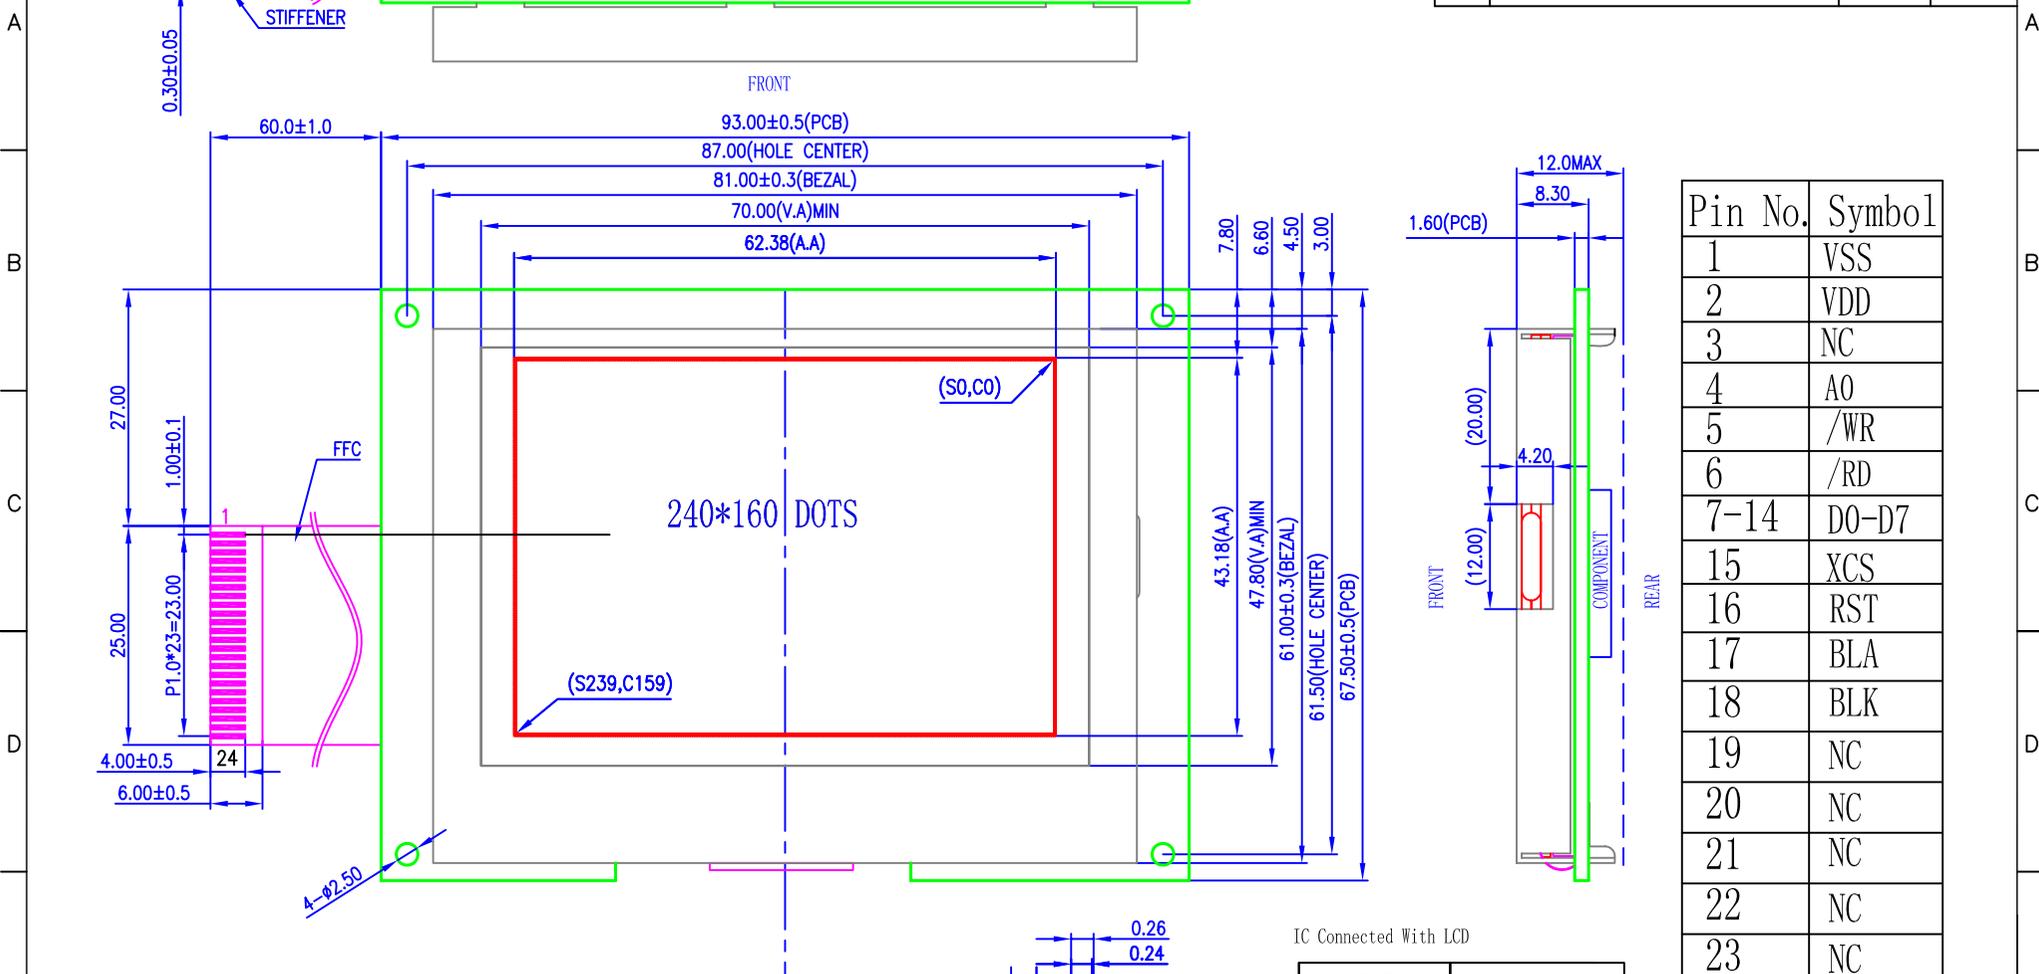

Pin No.	Symbol
1	VSS
2	VDD
3	NC
4	A0
5	/WR
6	/RD
7-14	DO-D7
15	XCS
16	RST
17	BLA
18	BLK
19	NC
20	NC
21	NC
22	NC
23	NC
24	NC

IC Connected With LCD

LCD PIN	IC PIN
CO-C79	COM0-COM79
C80-C159	COM159-COM80
S0-S239	SEG0-SEG239

NOTE:

- LCD TYPE: FSTN-POSITIVE
- POLARIZER MODE: TRANSFLECTIVE
- DRIVE METHOD: 1/160 DUTY, 1/11 BIAS,  $V_{op}=15.5V$
- VIEWING DIR.: 6:00
- OP. TEMP.:  $-20^{\circ}C \sim 70^{\circ}C$
- ST. TEMP.:  $-30^{\circ}C \sim 80^{\circ}C$
- BACKLIGHT: WHITE,  $V_f=5.0 \pm 0.2V$ ,  $I_f=80mA$
- LCD CONTROLLER: ST7529,  $VDD=3.3V$



深圳市华远显示器件有限公司  
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No.: HYG24016001G-FF62L-VB  
DRAWING TITLE: LCM  
FILE NO.: 8

DESIGN		STANDARD	
CHECKED		TECHNOLOGY	
APPROVED		Q. A	

REV. : A	SCALE : -
PROJECTION:	UNIT : MM
	SHEET : 1/1