


REV.	CHANGE CONTENT	BY	DATE

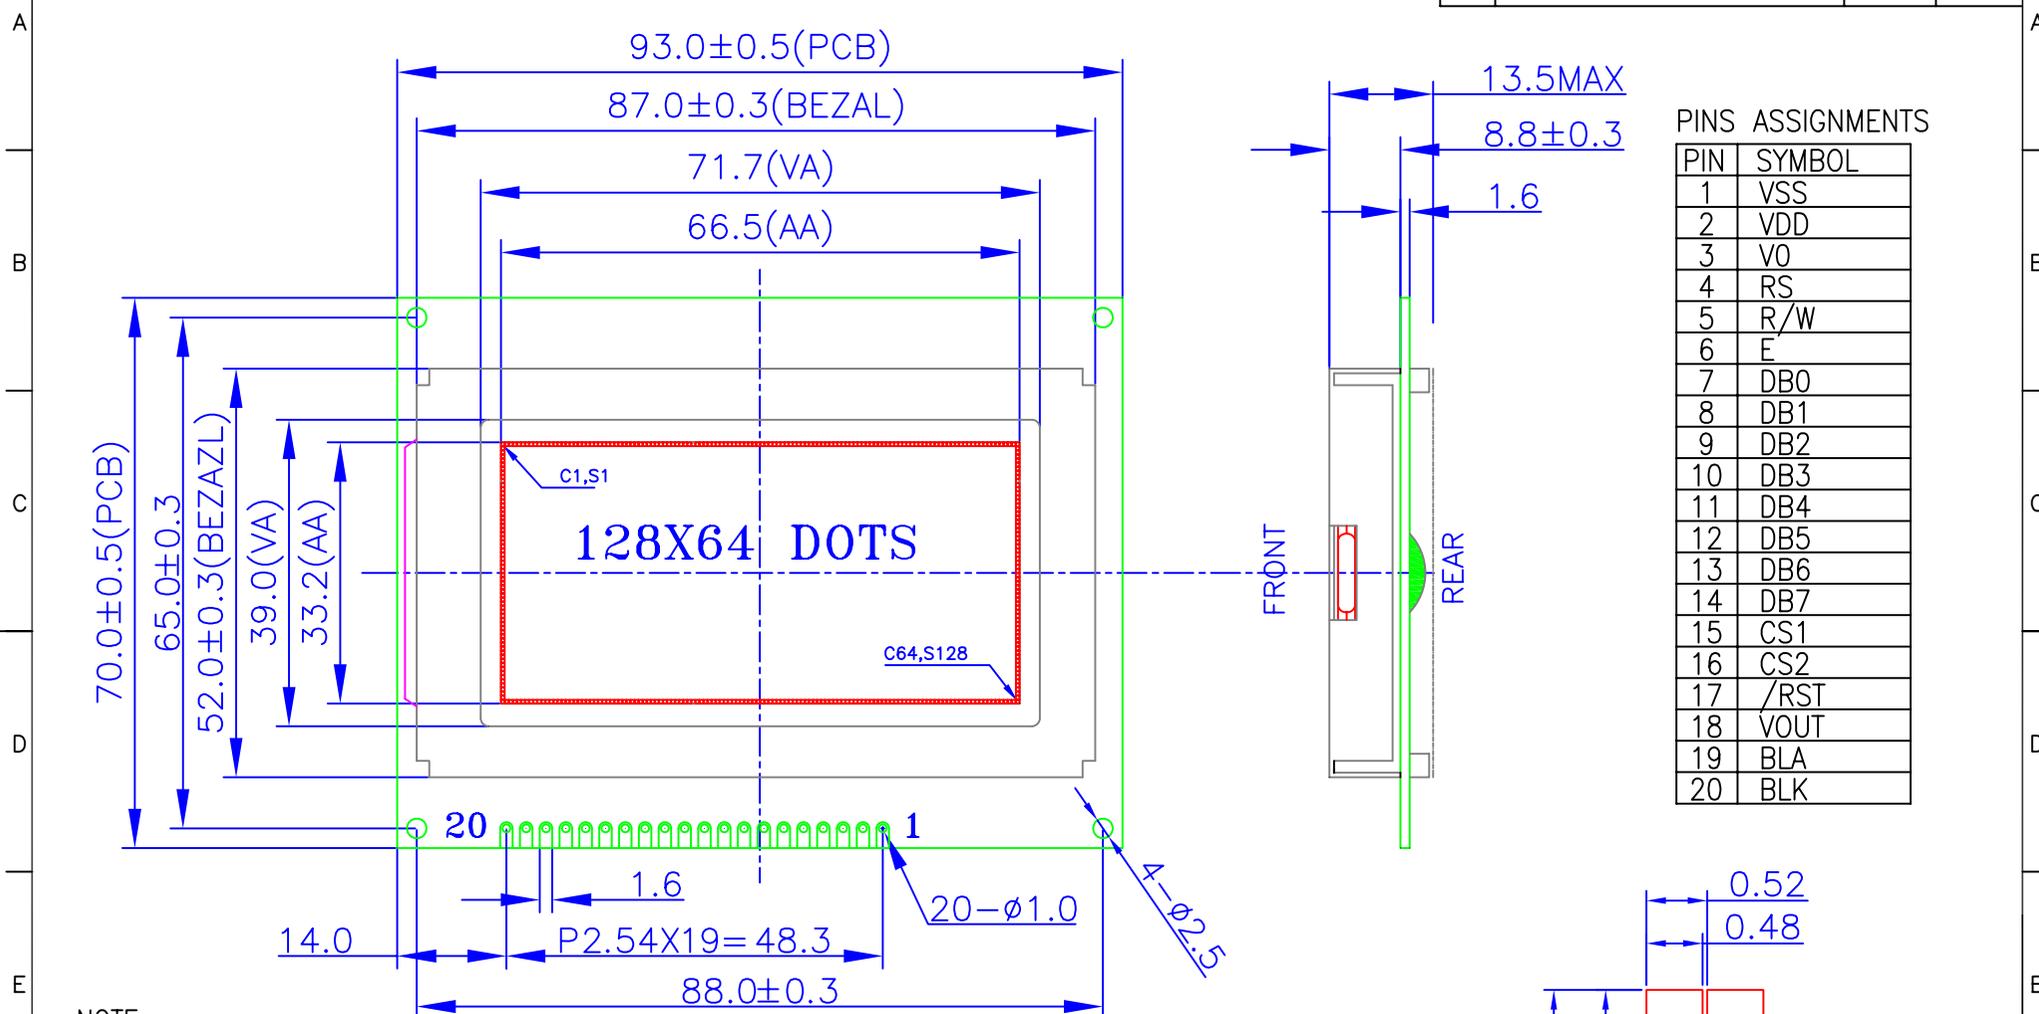

PINS ASSIGNMENTS

PIN	SYMBOL
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	CS2
17	/RST
18	VOUT
19	BLA
20	BLK

NOTE:

- LCD TYPE: FSTN-NEGATIVE
- POLARIZER MODE: TRANSMISSIVE
- DRIVE METHOD: 1/64 DUTY, 1/9 BIAS, Vop=11.0V
- VIEWING DIR.: 6:00
- OP. TEMP.: -20°C~70°C
- ST. TEMP.: -30°C~80°C
- BACKLIGHT: ORANGE, Vf=5.0V, If=250mA
- LCD CONTROLLER: SBN0064G, VDD=5.0V

	深圳市华远显示器件有限公司 SHENZHEN HUAYUAN DISPLAY CO., LTD			DRAWING No.:HYG1286406C-ft62L-VAG DRAWING TITLE : LCM FILE NO.: 8		
	DESIGN		TECHNOLOGY		REV. : A	SCALE : -
	CHECKED		Q.A		PROJECTION:	UNIT : MM
	STANDARD		APPROVED			SHEET : 1/1