



REV.	CHANGE CONTENT	BY	DATE

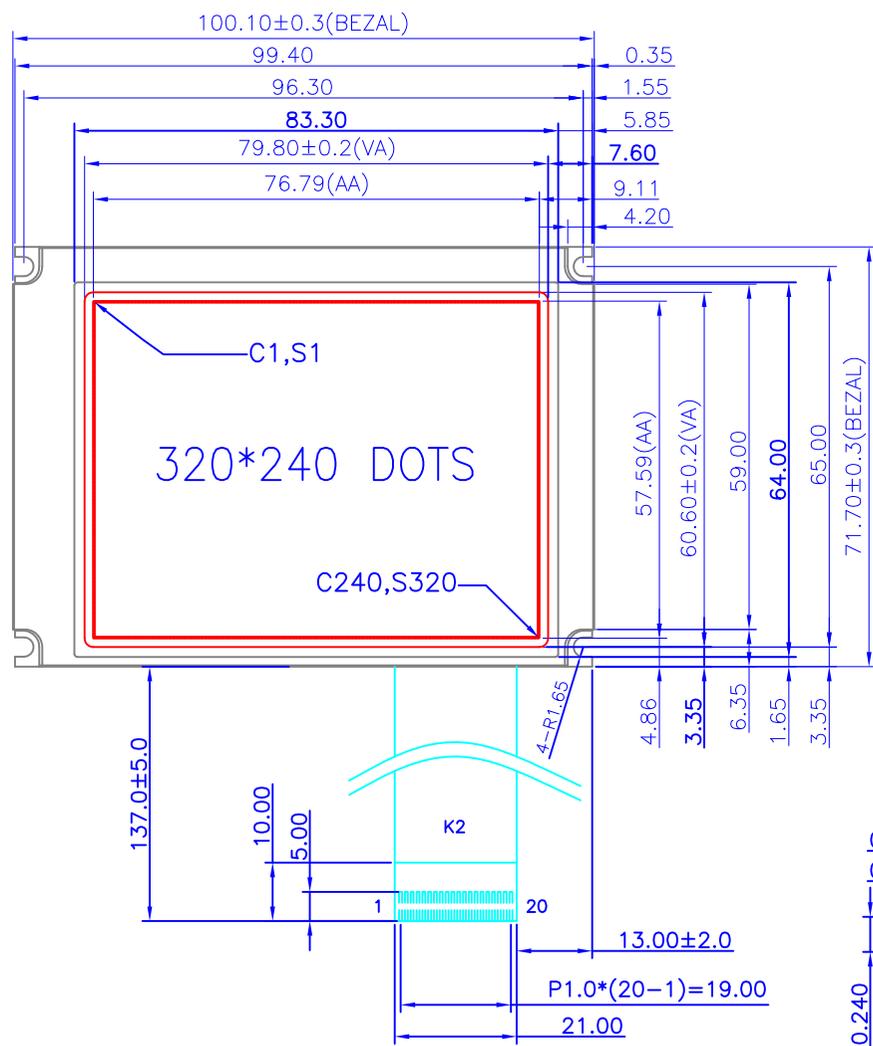

7.20±0.3

K2

PIN NO.	NAME
1	VSS
2	VDD
3	V0
4	/WR
5	/RD
6	/CS
7	A0
8	/RST
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	WAIT
18	VOUT
19	BLA
20	BLK

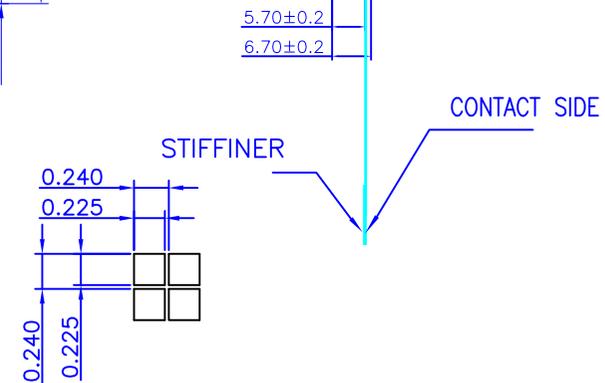

**NOTE:**

1. LCD TYPE: STN-NEGATIVE-BLUE
2. POLARIZER MODE: TRANSMISSIVE
3. DRIVE METHOD: 1/240 DUTY, 1/16 BIAS, Vop=22.5V
4. VIEWING DIR.: 9:00
5. OP. TEMP.: -10°C~60°C
6. ST. TEMP.: -20°C~70°C
7. BACKLIGHT: WHITE, Vf=5.0V, If=120mA
8. LCD CONTROLLER: S1D13700, VDD=5.0V

<p>华远显示 H-Y DISPLAY</p>	深圳市华远显示器件有限公司 SHENZHEN HUAYUAN DISPLAY CO., LTD			DRAWING No.: HYG32024021G-bT91L-VA	
				DRAWING TITLE : LCM	
				FILE NO.: 8	
				REV. : A	SCALE : -
DESIGN		TECHNOLOGY		PROJECTION:	UNIT : MM
CHECKED		Q.A			SHEET : 1/1
STANDARD		APPROVED			