


REV.	CHANGE CONTENT	BY	DATE

A
B
C
D
E
F

A
B
C
D
E
F

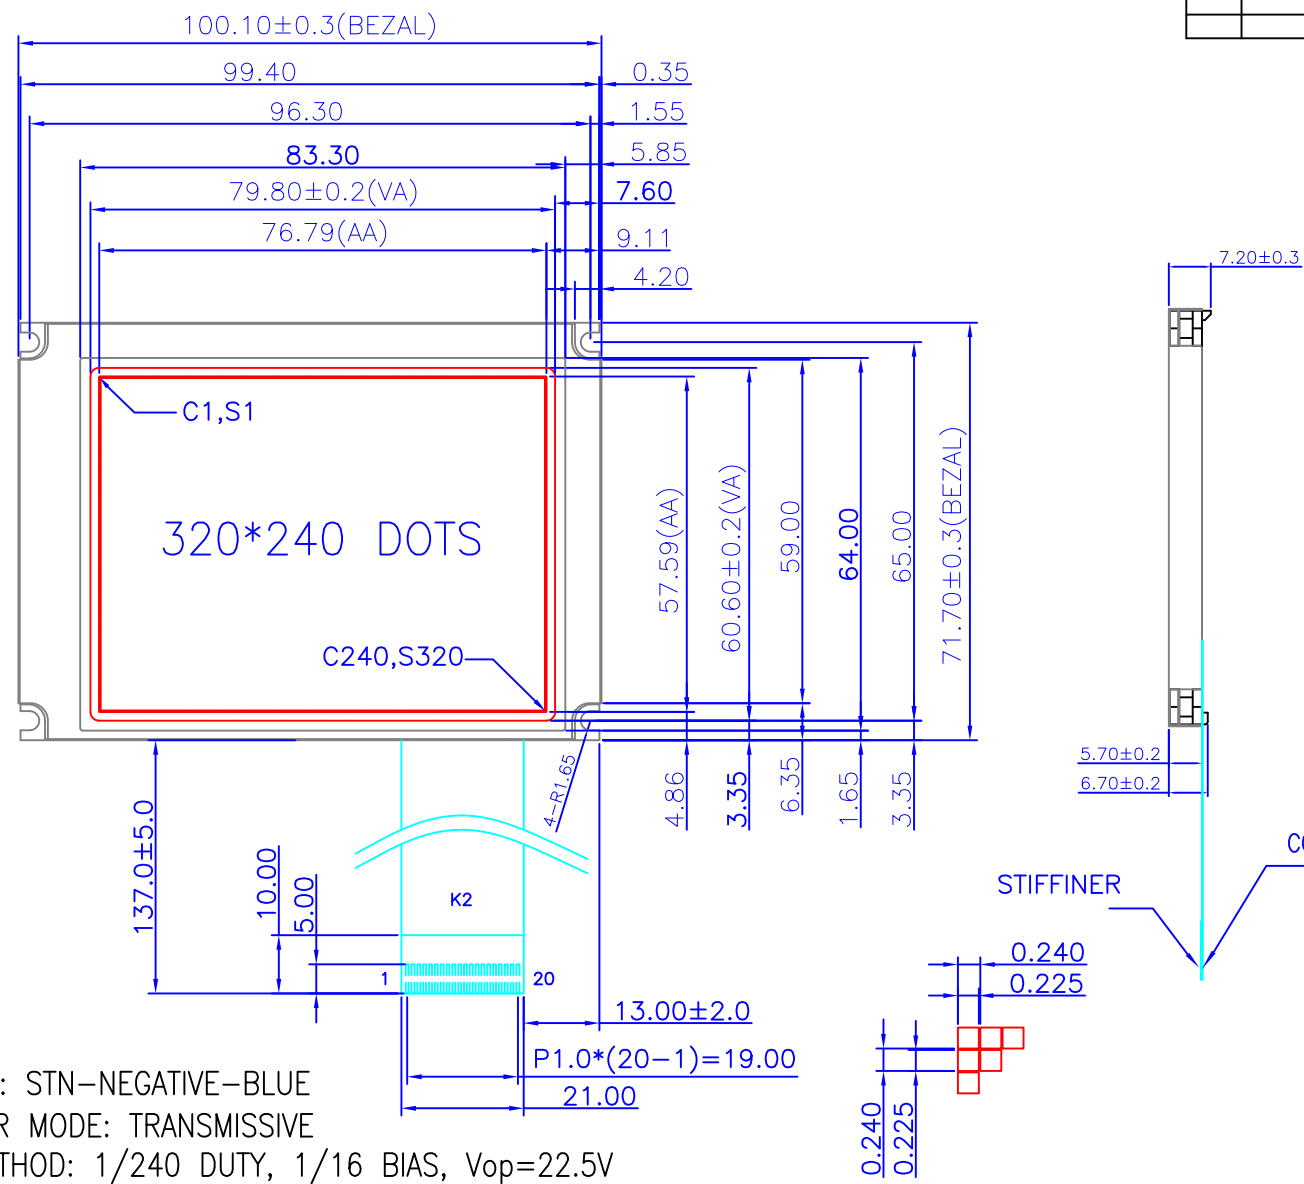

K2

PIN NO.	NAME
1	VSS
2	VDD
3	VO
4	/WR
5	/RD
6	/CS
7	A0
8	/RST
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	BUSY
18	VOUT
19	BLA
20	BLK

NOTE:

- LCD TYPE: STN-NEGATIVE-BLUE
- POLARIZER MODE: TRANSMISSIVE
- DRIVE METHOD: 1/240 DUTY, 1/16 BIAS, $V_{op}=22.5V$
- VIEWING DIR.: 9:00
- OP. TEMP.: $-10^{\circ}C \sim 60^{\circ}C$
- ST. TEMP.: $-20^{\circ}C \sim 70^{\circ}C$
- BACKLIGHT: WHITE, $V_f=5.0V$, $I_f=120mA$
- LCD CONTROLLER: RA8803P1N-S, $VDD=5.0V$

	深圳市华远显示器件有限公司 SHENZHEN HUAYUAN DISPLAY CO., LTD			DRAWING No.: HYG32024025G-bT91L-VB	
				DRAWING TITLE : LCM	
				FILE NO.: 8	
				REV. : A	SCALE : -
DESIGN		TECHNOLOGY		PROJECTION:	UNIT : MM
CHECKED		Q.A			SHEET : 1/1
STANDARD		APPROVED			

1 4 5 6 7 8